

Product Summary

$V_{(BR)CES}$	$V_{CE(SAT)MAX}$	I_c
650V	1.95V@15V	20A


Feature

- High speed smooth switching device for hard & soft switching
- Positive temperature coefficient
- High ruggedness, temperature stable

Application


- Soft switching applications
- Air conditioning
- Motor drive inverter

Package



ITO-220AB

Circuit diagram

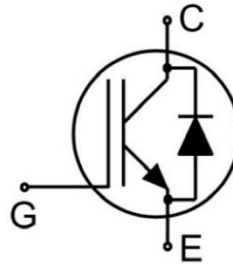

Marking



Absolute maximum ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CES}	650	V
Continuous Gate-Emitter Voltage	V_{GE}	± 20	V
Transient Gate-Emitter Voltage((tp≤10μs,D<0.01)	V_{GE}	± 30	V
DC Collector Current, limited by T_{jmax}	I_C	25	A
DC Collector Current, limited by $T_{jmax}(T_C = 100^\circ C)$	$I_C(100^\circ C)$	15	A
Diode Forward Current, limited by T_{jmax}	I_F	25	A
Diode Forward Current, limited by $T_{jmax}(T_C = 100^\circ C)$	$I_F(100^\circ C)$	15	A
Turn off Safe Operating Area $V_{CE} \leq 600V, T_j \leq 150^\circ C$		60	A
Pulsed Collector Current, $V_{GE}=15V, tp$ limited by T_{jmax}	I_{CM}	60	A
Short Circuit Withstand Time, $V_{GE}= 15V, V_{CE} \leq 400V$	T_{SC}	5	μs
Diode Pulsed Current, tp limited by T_{jmax}	I_{Fpuls}	60	A
Power Dissipation	P_{tot}	37	W
Thermal Resistance, Junction to case for Diode	$R_{\theta JC}$	4.8	°C/W
Thermal Resistance, Junction to case for IGBT	$R_{\theta JC}$	4.0	°C/W
Soldering Temperature, wave soldering 1.6mm (0.063in.) from case for 10s		260	°C
Junction Temperature	T_J	175	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Electrical characteristics (Tj=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Collector-Emitter Breakdown Voltage	$V_{(BR)CES}$	$V_{GE} = 0V, I_C = 250\mu A$	650			V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}, I_C = 1mA$	5.0	5.8	6.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=20A$		1.60	1.95	V
		$V_{GE}=15V, I_C=20A, T_j=125^\circ C$		1.75		
		$V_{GE}=15V, I_C=20A, T_j=150^\circ C$		1.80		
Zero Gate Voltage Collector Current	I_{CES}	$V_{CE}=650V, V_{GE}=0V$			0.25	mA
		$V_{CE}=650V, V_{GE}=0V, T_j=150^\circ C$			1.00	
Gate to Emitter Leakage Current	I_{GES}	$V_{CE} = 0V, V_{GE} = \pm 20V$			± 200	nA
Dynamic characteristics						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V, f=1MHz$		0.90		nF
Output Capacitance	C_{oes}			0.04		
Reverse Transfer Capacitance	C_{res}			0.01		
Gate Charge	Q_g	$V_{CC}=300V, V_{GE} = 15V, I_C=20A$		0.085		μC
Short circuit collector current	$I_{C(SC)}$	$V_{GE}=15V, t_{sc} \leq 5\mu s, V_{CC}=400V, T_{j,start}=25^\circ C$		115		A

Switching Characteristic, Inductive Load

Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=300V, V_{GE}=-5V \sim 15V, I_C = 20A, R_G=51\Omega$		12		nS
Rise Time	t_r			33		
Turn-off Delay Time	$t_{d(off)}$			68		
Fall time	t_f			129		
Turn-off Energy	E_{off}			0.22		mJ
Turn-on Energy	E_{on}			0.41		

Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=300V, V_{GE}=-5V\sim 15V,$ $I_C = 20A, R_G=51\Omega, T_J=125^\circ C$		16	nS	
Rise Time	t_r			41		
Turn-off Delay Time	$t_{d(off)}$			69		
Fall time	t_f			154		
Turn-off Energy	E_{off}			0.35	mJ	
Turn-on Energy	E_{on}			0.48		
Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=300V, V_{GE}=-5V\sim 15V,$ $I_C = 20A, R_G=51\Omega, T_J=150^\circ C$		18	nS	
Rise Time	t_r			49		
Turn-off Delay Time	$t_{d(off)}$			69		
Fall time	t_f			173		
Turn-off Energy	E_{off}				0.38	mJ
Turn-on Energy	E_{on}				0.52	

Electrical characteristics of the Diode ($T_J=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Diode Forward Voltage	V_F	$I_F=20A, T_J=25^\circ C$		2.0	2.5	V
		$I_F=20A, T_J=125^\circ C$		1.8		
		$I_F=20A, T_J=150^\circ C$		1.7		
Reverse Recovery Current	I_{rr}	$I_F=20A, V_R=300V,$ $-di/dt= 360A/\mu s$		6		A
Diode reverse recovery Time	t_{rr}			200		nS
Reverse Recovery Charge	Q_{rr}			0.25		μC
Reverse recovery Energy	E_{rec}			0.07		mJ
Reverse Recovery Current	I_{rr}	$I_F=20A, V_R=300V,$ $-di/dt= 360A/\mu s, T_J=125^\circ C$		8		A
Diode reverse recovery Time	t_{rr}			218		nS
Reverse Recovery Charge	Q_{rr}			0.59		μC
Reverse recovery Energy	E_{rec}			0.13		mJ
Reverse Recovery Current	I_{rr}	$I_F=20A, V_R=300V,$ $-di/dt= 360A/\mu s, T_J=150^\circ C$		9		A
Diode reverse recovery Time	t_{rr}			227		nS
Reverse Recovery Charge	Q_{rr}			0.78		μC
Reverse recovery Energy	E_{rec}			0.16		mJ

Typical Characteristics

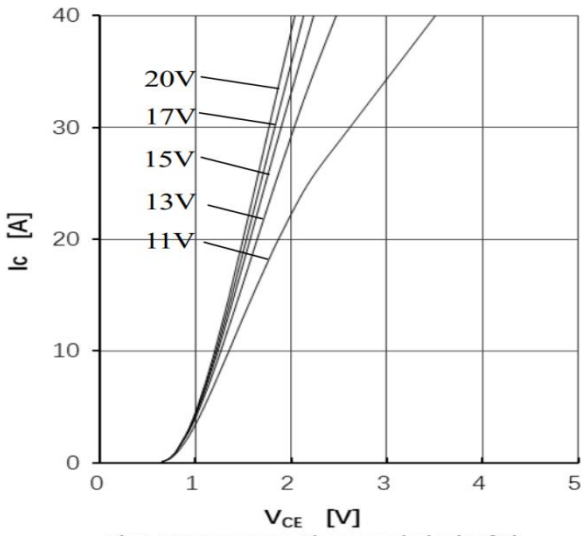


Fig1.IGBT Output Characteristics(25°C)

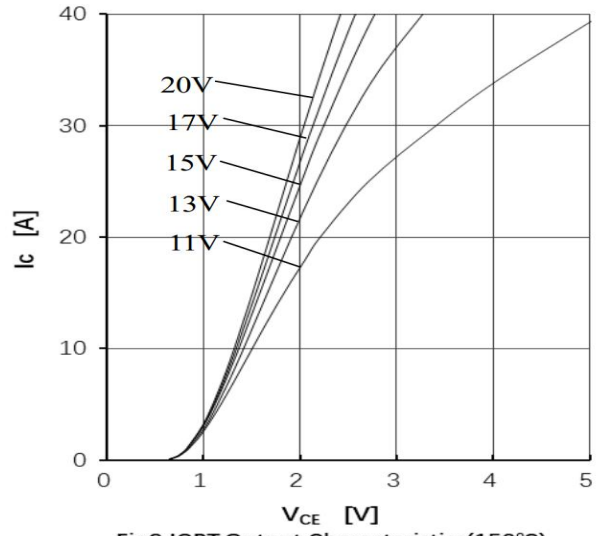


Fig2.IGBT Output Characteristics(150°C)

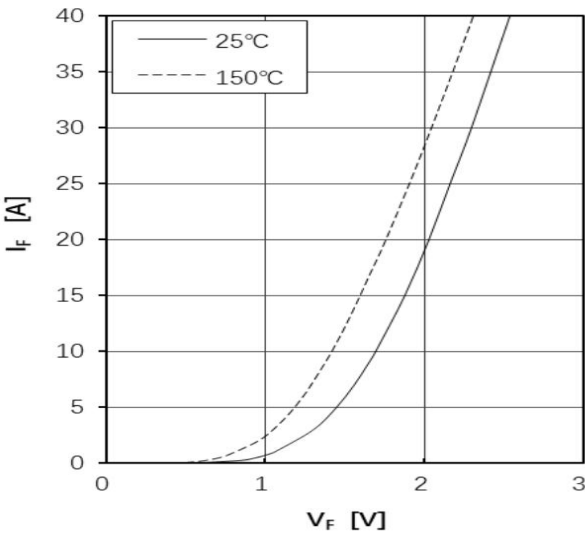


Fig3.Diode Forward Characteristics

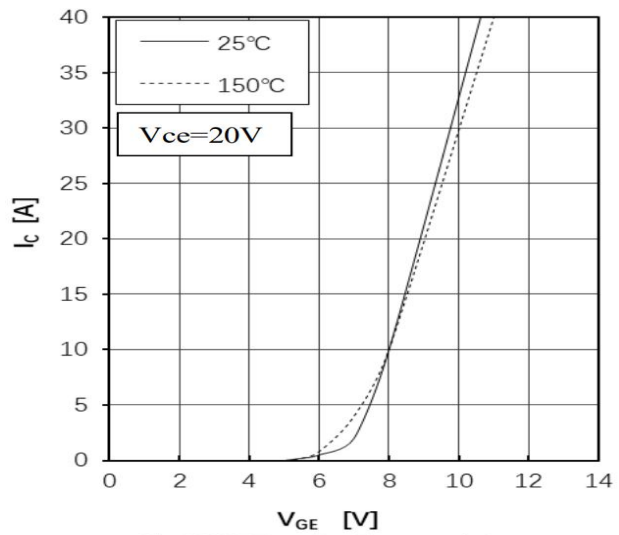


Fig4.IGBT Transfer Characteristics

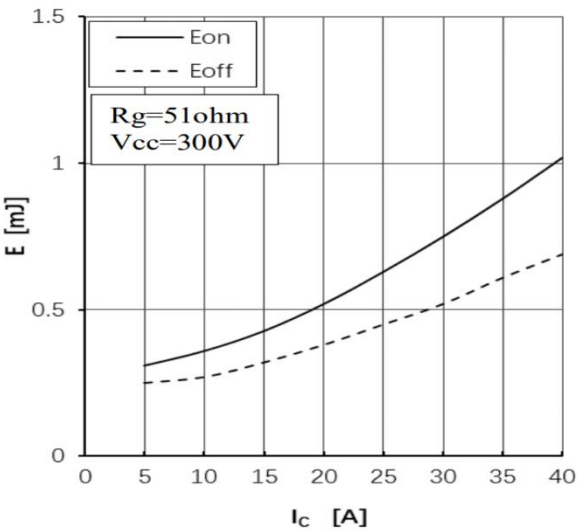


Fig5.IGBT Switching Loss vs. I_c (150°C)

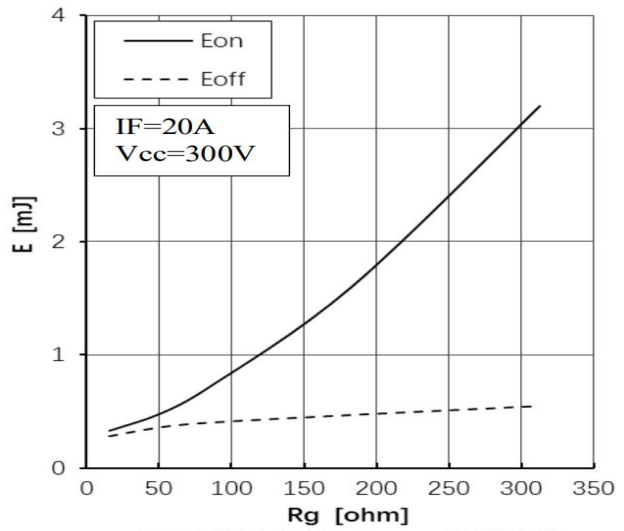


Fig6.IGBT Switching Loss vs. R_g (150°C)

Typical Characteristics

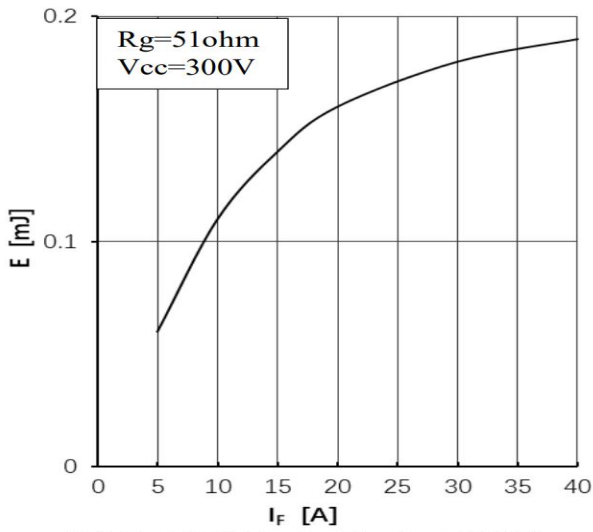


Fig7. Diode Switching Loss(Erec) vs. I_F (150°C)

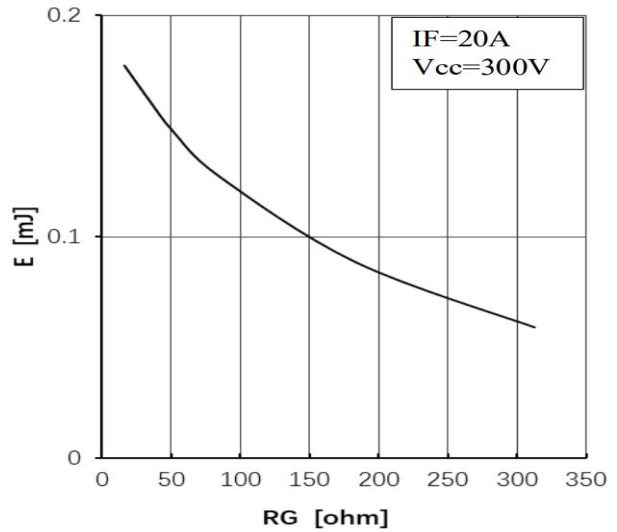


Fig8. Diode Switching Loss(Erec) vs. R_G (150°C)

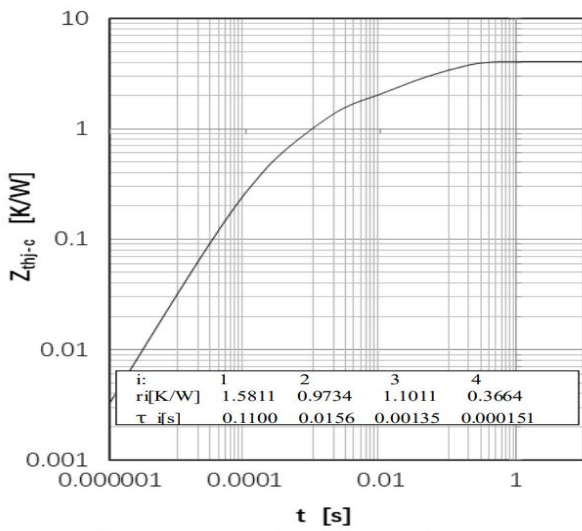


Fig 9. IGBT Transient Thermal Impedance


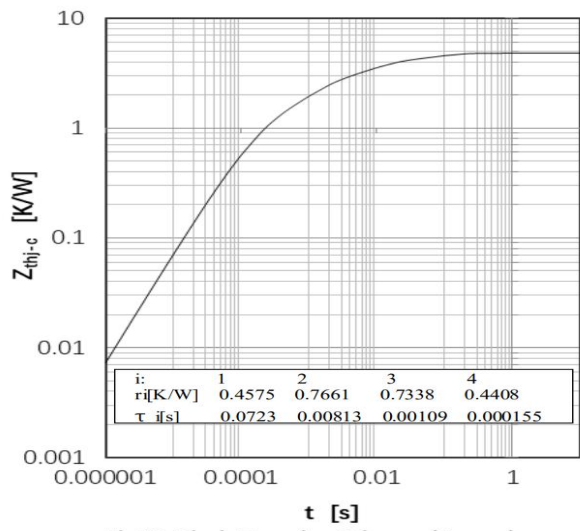


Fig10. Diode Transient Thermal Impedance

ITO-220AB Package Information

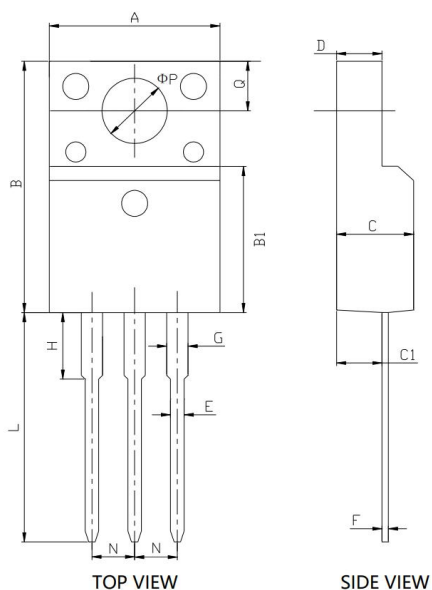

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	9.700	10.300	0.382	0.406
B	15.500	16.100	0.610	0.634
B1	8.990	9.390	0.354	0.370
C	4.400	4.900	0.173	0.193
C1	2.600	2.950	0.102	0.116
D	2.340	2.740	0.092	0.108
E	0.700	0.900	0.028	0.035
F	0.400	0.600	0.016	0.024
G	1.120	1.420	0.044	0.056
H	2.700	3.600	0.106	0.142
L	12.600	13.600	0.496	0.535
N	2.340	2.740	0.092	0.108
Q	3.150	3.550	0.124	0.140
ΦP	3.000	3.300	0.118	0.130