

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
25V	1Ω@10V	1A
	1.2Ω@4.5V	
	2.5Ω@2.5V	

Feature

- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- ESD protected
- Suffix "-Q1" for AEC-Q101

Application


- Power switching application
- Uninterruptible power supply
- DC-DC convertor

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	25	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current ^{1,2)} (V _{GS} =10V)	I _D	1	A
Continuous Drain Current ^{1,2)} (V _{GS} =10V, T _A =100°C)	I _D (100°C)	0.6	A
Pulsed Drain Current (t _p ≤10μs)	I _{DM}	4	A
Power Dissipation ^{1,2)}	P _D	0.86	W
Thermal Resistance Junction to Ambient ²⁾	R _{θJA}	145	°C/W
Operating Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C

Electrical characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =250μA	25			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =25V, V _{GS} =0V			1	μA
Gate-body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±10	μA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.55	0.85	1.15	V
Drain-source on-resistance	R _{DS(on)}	V _{GS} =10V, I _D =0.5A		0.39	1	Ω
		V _{GS} =4.5V, I _D =0.3A		0.56	1.2	
		V _{GS} =2.5V, I _D =0.2A		1.02	2.5	
Dynamic characteristics³⁾						
Input Capacitance	C _{iss}	V _{DS} =12.5V, V _{GS} =0V f =1MHz		14.3		pF
Output Capacitance	C _{oss}			9		
Reverse Transfer Capacitance	C _{rss}			4		
Total Gate Charge	Q _g	V _{DS} =12.5V, V _{GS} =10V I _D =0.5A		0.8		nC
Gate-Source Charge	Q _{gs}			0.07		
Gate-Drain Charge	Q _{gd}			0.08		
Turn-on delay time	t _{d(on)}	V _{DS} =12.5V, V _{GS} =10V I _D =0.5A, R _G =3Ω, R _L =25Ω		2		nS
Turn-on rise time	t _r			2.6		
Turn-off delay time	t _{d(off)}			7		
Turn-off fall time	t _f			5.4		
Source-Drain Diode characteristics						
Diode Forward Current	I _S				1	A
Diode Forward voltage	V _{SD}	V _{GS} =0V, I _S =0.5A			1.2	V
Reverse recovery time	T _{rr}	V _{GS} =0V, V _R =12.5V, I _F =0.5A di/dt =-100 A/μs		8.9		nS
Reverse recovery charge	Q _{rr}			2.6		nC

Notes:

- 1) The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2) The value of R_{θJA} is measured with the device mounted on the 40mm*40mm*1.1mm single layer FR-4 PCB board with 1 in² pad of 2oz. Copper, in the still air environment with T_A=25°C. The maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
- 3) Guaranteed by design, not subject to production testing.

Typical Characteristics

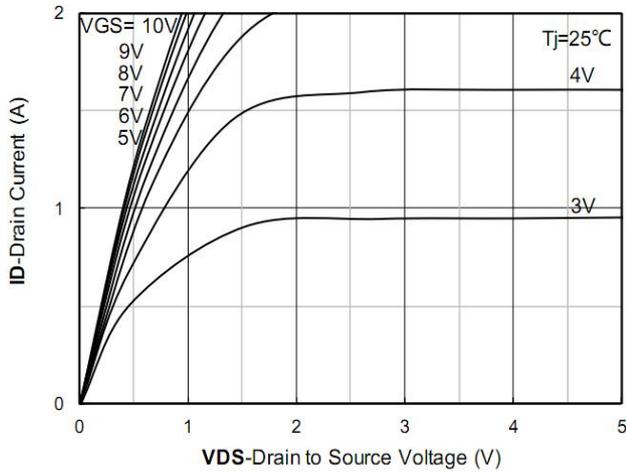


Figure 1. Output Characteristics; typical values

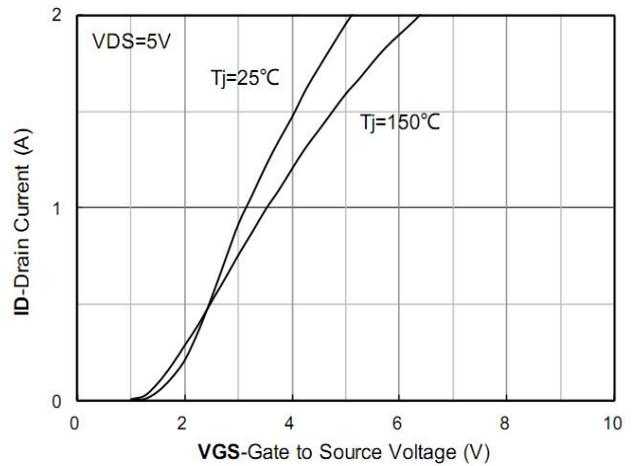


Figure 2. Transfer Characteristics; typical values

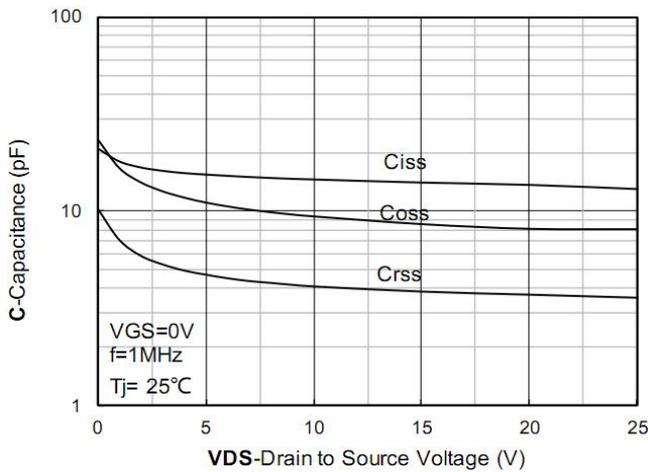


Figure 3. Capacitance Characteristics; typical values

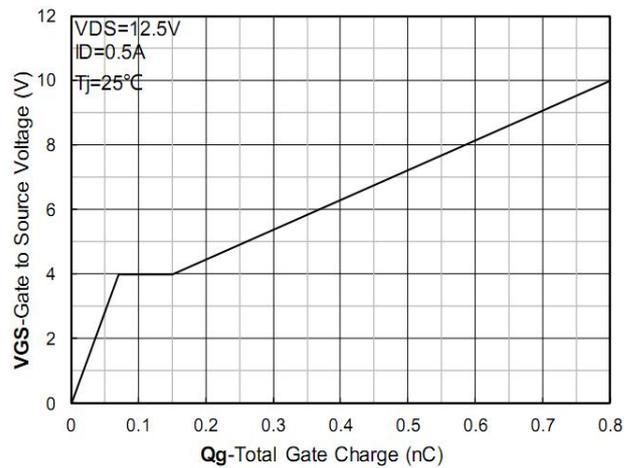


Figure 4. Gate Charge; typical values

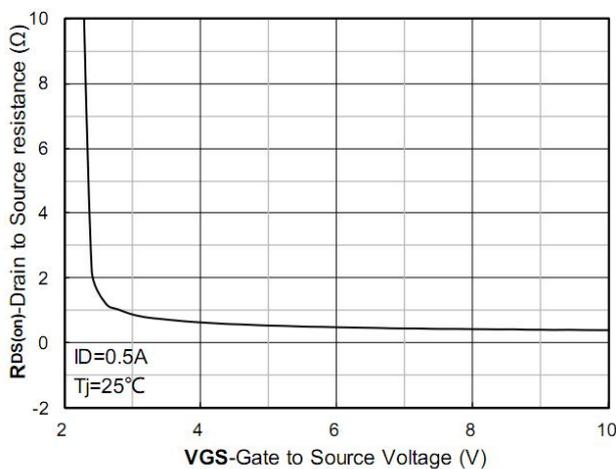


Figure 5. On-Resistance vs Gate to Source Voltage; typical values

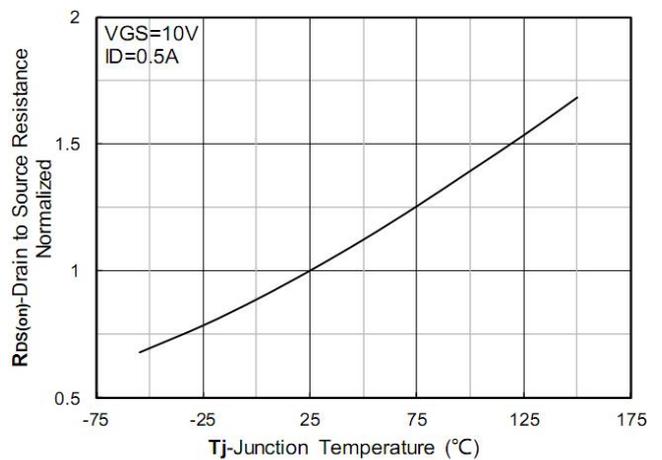


Figure 6. Normalized On-Resistance

Typical Characteristics

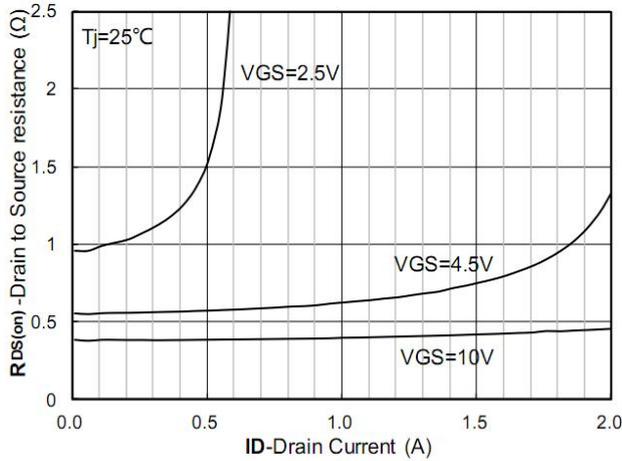


Figure 7. $R_{DS(on)}$ VS Drain Current; typical values

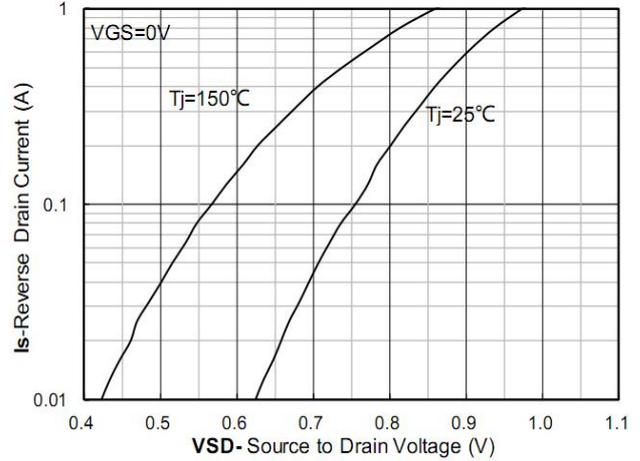


Figure 8. Forward characteristics of reverse diode; typical values

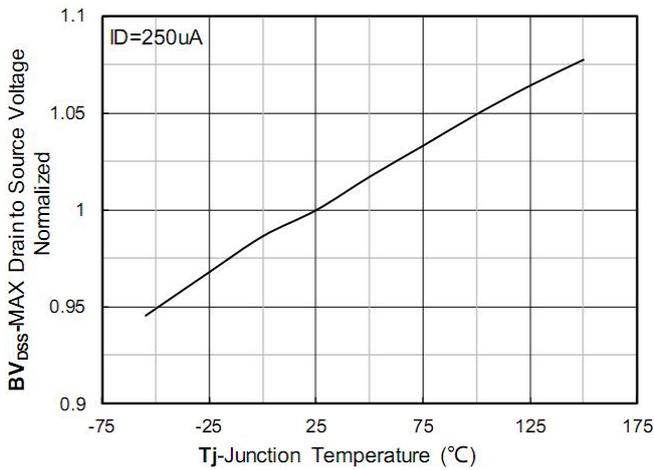


Figure 9. Normalized breakdown voltage

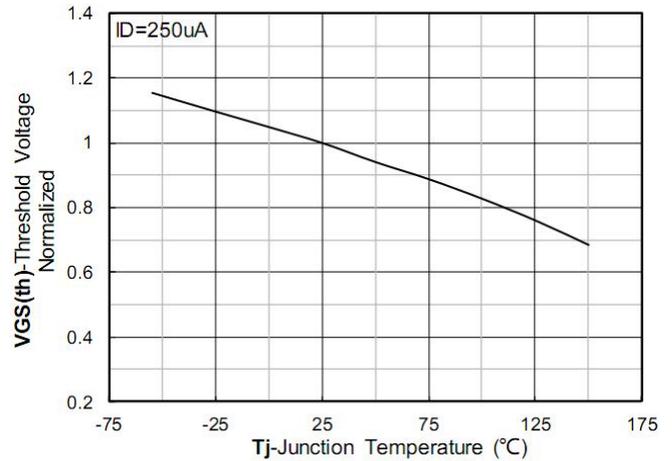


Figure 10. Normalized Threshold voltage

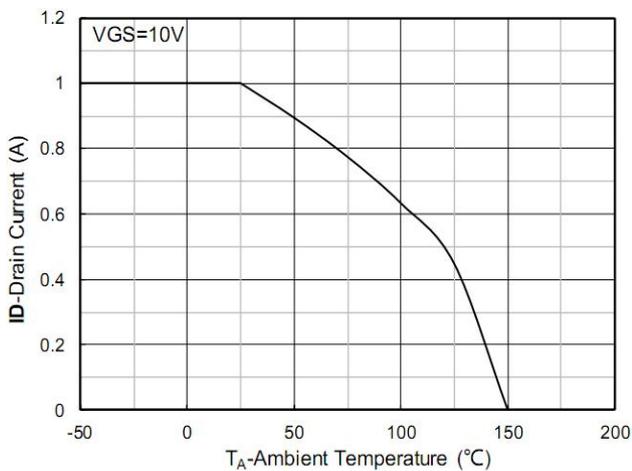


Figure 11. Current dissipation

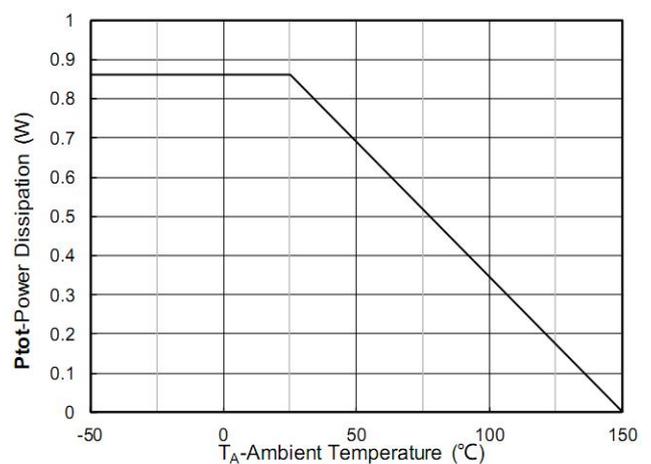


Figure 12. Power dissipation

Typical Characteristics

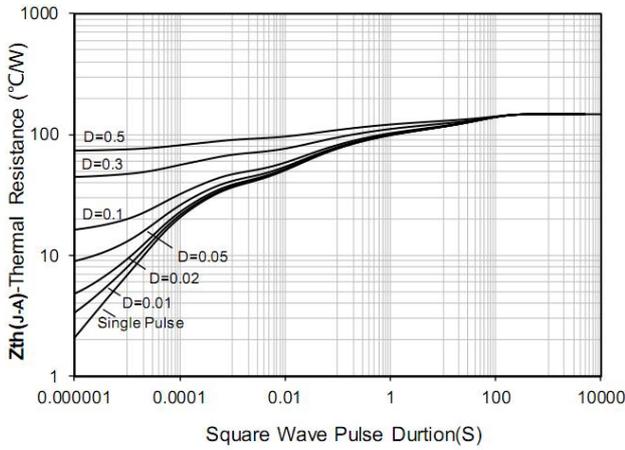


Figure 13. Maximum Transient Thermal Impedance


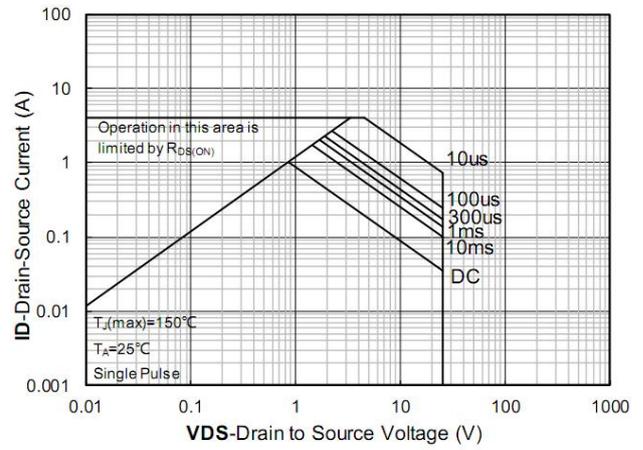


Figure 14. Safe Operation Area

SOT-23 Package Information

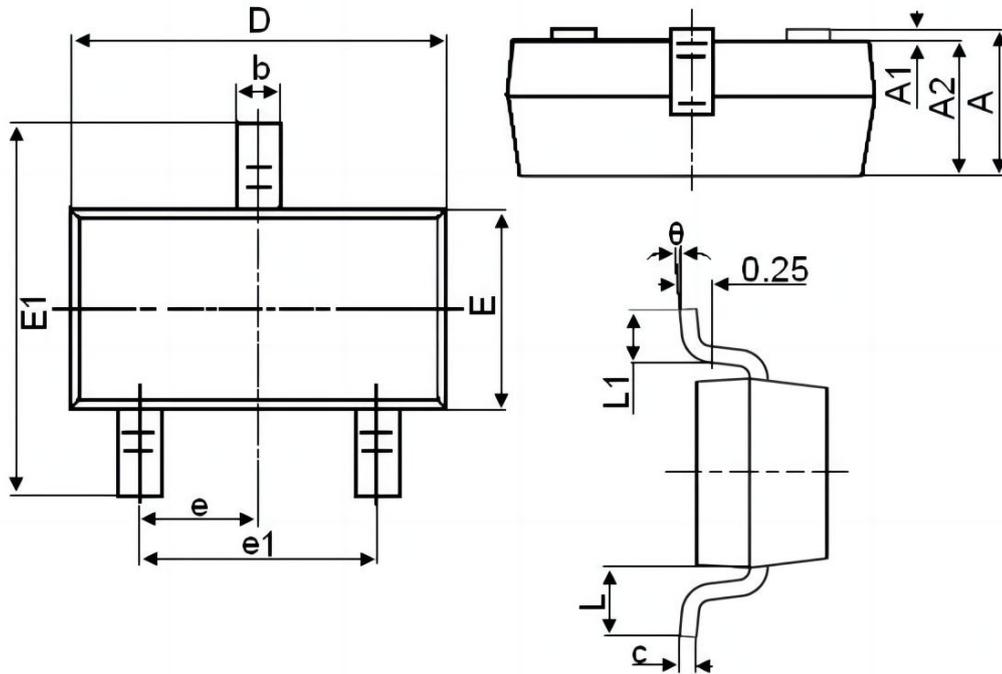

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°