

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-20V	34mΩ@-4.5V	-5A
	48mΩ@-2.5V	


Feature

- High power and current handling capability
- Surface mount package
- ESD Protected

Application


- Battery switch
- DC/DC Converter

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 10	V
Continuous Drain Current	I_D	-5	A
Pulsed Drain Current	I_{DM}	-20	A
Power Dissipation	P_D	0.9	W
Thermal Resistance from Junction to Ambient ¹⁾	$R_{\theta JA}$	138.8	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$


Electrical characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-20			V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=-16V, V_{GS}=0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 10V$			± 5	μA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.4	-0.65	-1.0	V
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-4A$		27	34	m Ω
		$V_{GS}=-2.5V, I_D=-3A$		36	48	
Dynamic characteristics ¹⁾						
Input Capacitance	C_{iss}	$V_{DS}=-10V, V_{GS}=0V, f=1MHz$		550		pF
Output Capacitance	C_{oss}			125		
Reverse Transfer Capacitance	C_{rss}			96		
Total Gate Charge	Q_g	$V_{DS}=-10V, V_{GS}=-4.5V$ $I_D=-5A$		14		nC
Gate-Source Charge	Q_{gs}			2		
Gate-Drain Charge	Q_{gd}			2.5		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=-10V, V_{GS}=-4.5V$ $R_G=3\Omega, R_L=2.5\Omega$		5		nS
Turn-on rise time	t_r			46		
Turn-off delay time	$t_{d(off)}$			55		
Turn-off fall time	t_f			67		
Source-Drain Diode characteristics						
Diode Continuous Current	I_S				-5	A
Diode Forward voltage	V_{SD}	$V_{GS}=0V, I_S=-1A, T_J=25^{\circ}C$			-1.2	V


Notes:

1) Guaranteed by design, not subject to production testing.


Typical Characteristics

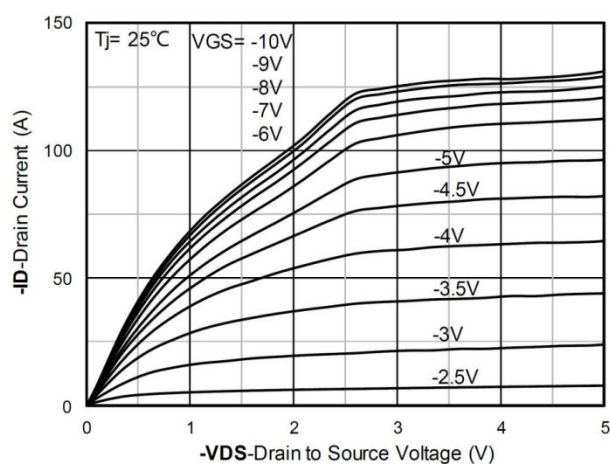


Output Characteristics

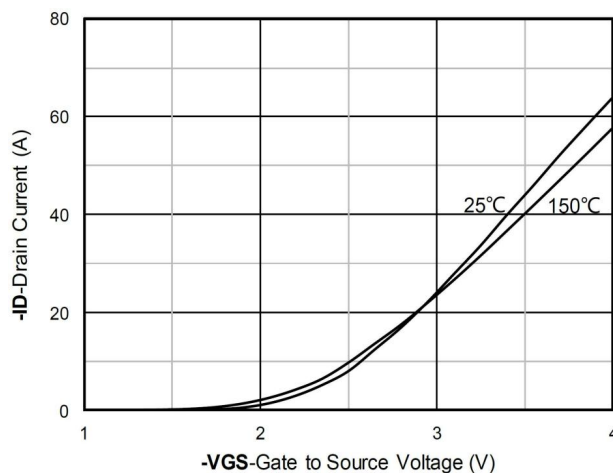


Transfer Characteristics

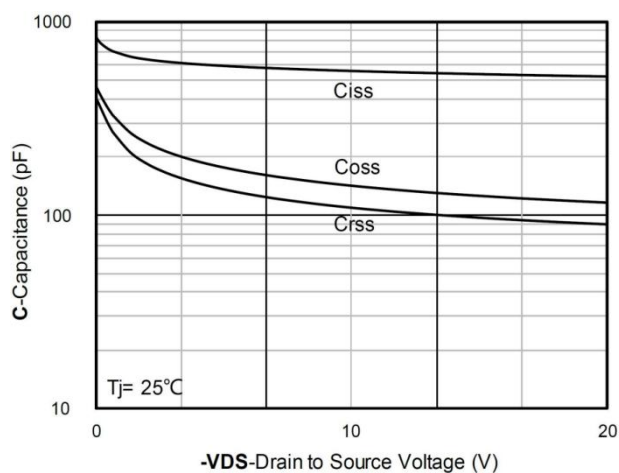


Capacitance Characteristics

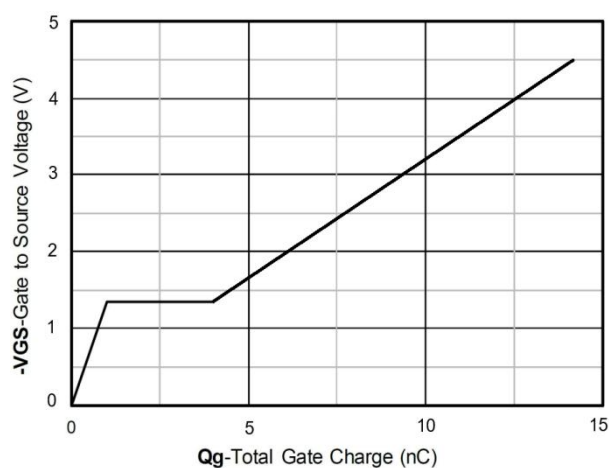

Gate Charge

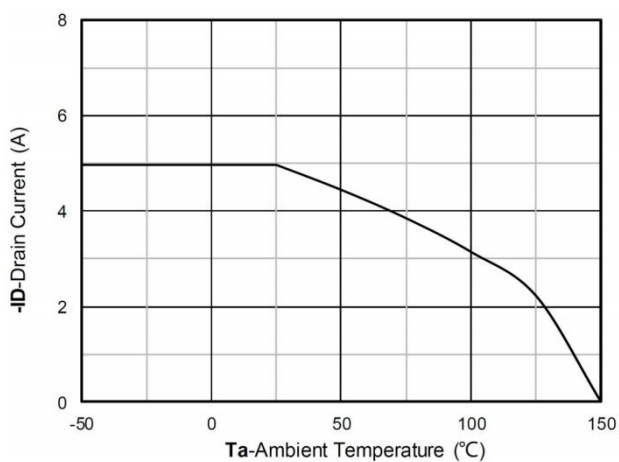


Current dissipation

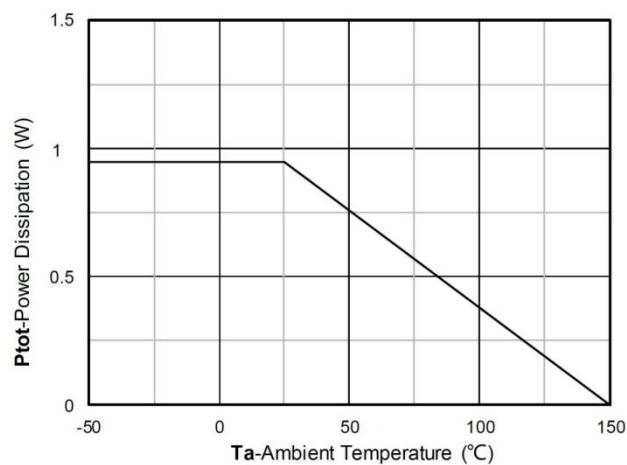


Power dissipation


Typical Characteristics

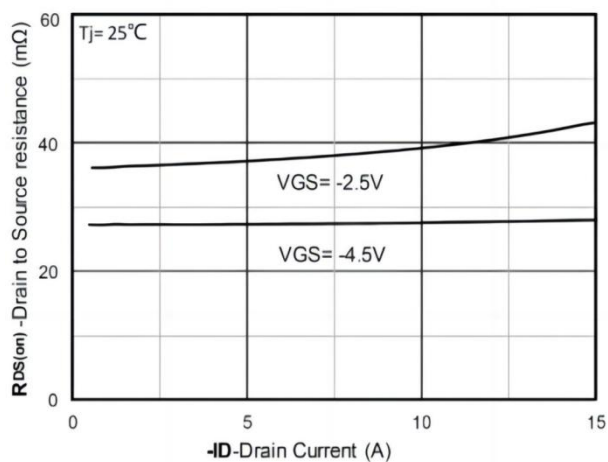


$R_{DS(on)}$ VS Drain Current

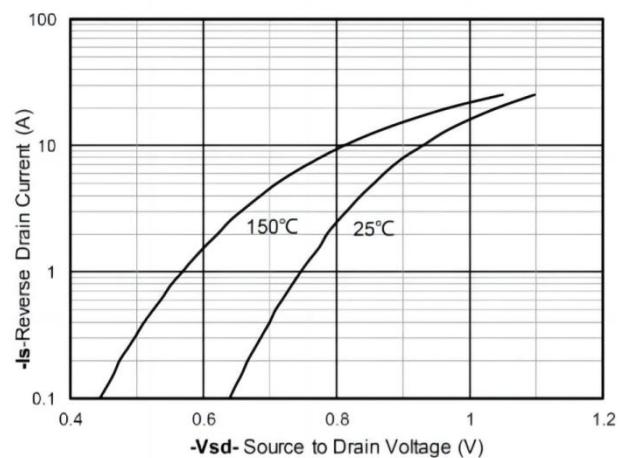


Forward characteristics of reverse diode

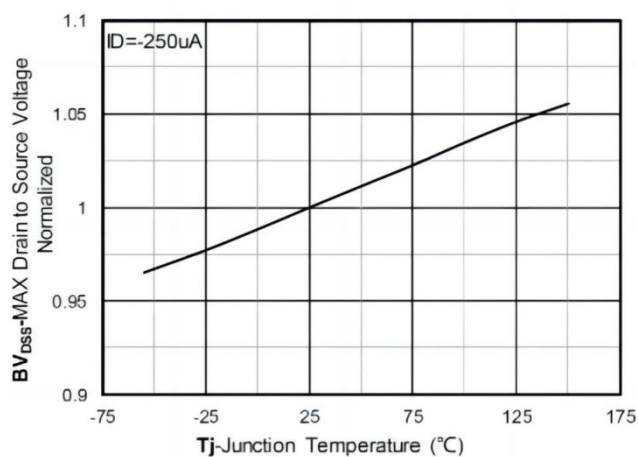


Normalized breakdown voltage

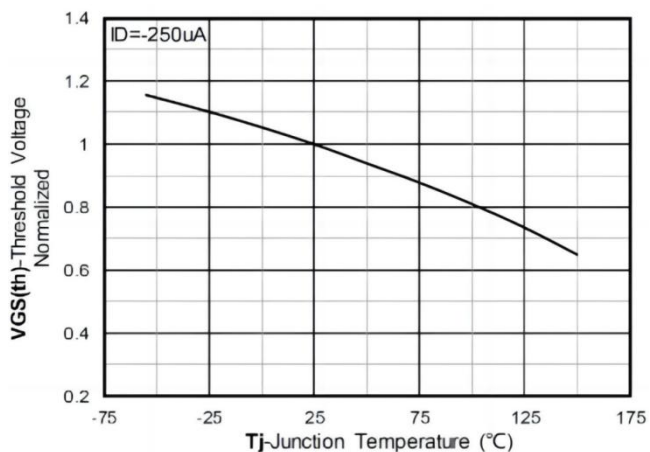

Normalized Threshold voltage

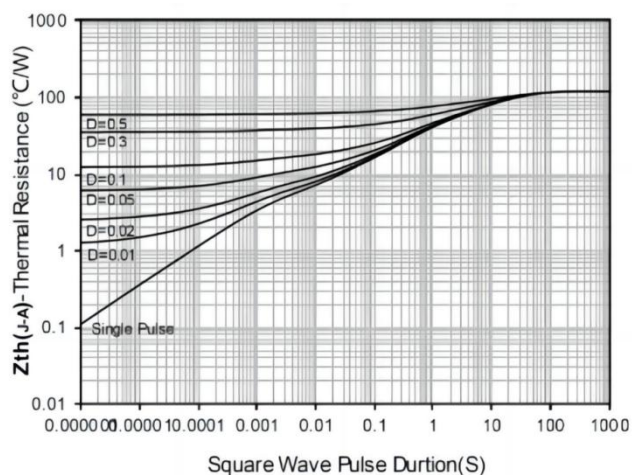


Maximum Transient Thermal Impedance

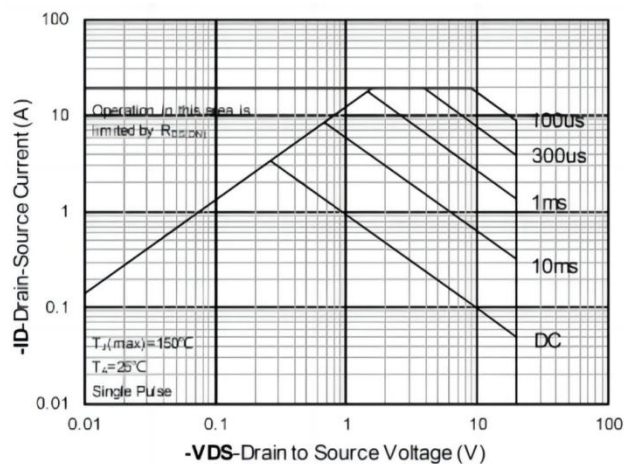

Safe Operation Area

SOT-23 Package Information

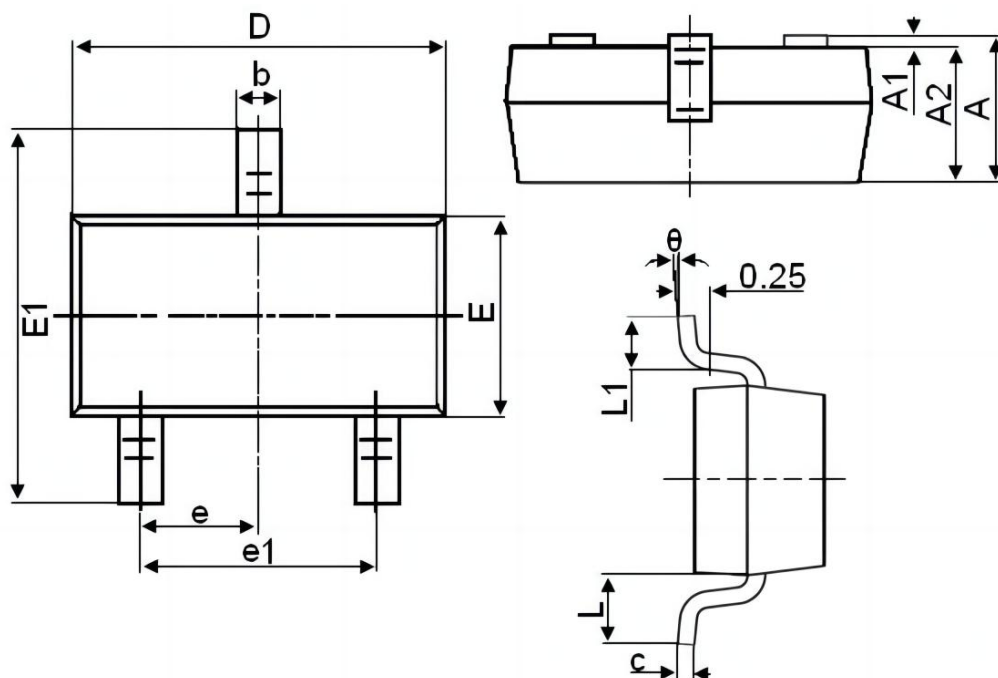

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°