

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
30V	420mΩ@4.5V	0.6A
	540mΩ@2.5V	

Feature

- N-Channel switch with low RDS(on)
- Operated at low logic level gate drive
- Suffix "-Q1" for AEC-Q101

Application


- Switching application

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current ¹⁾	I_D	0.6	A
Pulsed Drain Current ($t_p=10\mu\text{s}$)	I_{DM}	1.8	A
Single Pulse Avalanche Energy ²⁾	E_{AS}	2	mJ
Power Dissipation ¹⁾	P_D	0.35	W
Thermal Resistance Junction to Ambient ¹⁾	$R_{\theta JA}$	357	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	30			V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=30\text{V}, V_{GS}=0\text{V}$			1	μA
Gate-body leakage current	I_{GSS}	$V_{DS}=0\text{V}, V_{GS}=\pm 10\text{V}$			± 3	μA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.5	0.95	1.5	V
Drain-source on-resistance ³⁾	$R_{DS(on)}$	$V_{GS}=4.5\text{V}, I_D=0.6\text{A}$		335	420	m Ω
		$V_{GS}=2.5\text{V}, I_D=0.3\text{A}$		404	540	
Dynamic characteristics⁴⁾						
Input Capacitance	C_{iss}	$V_{DS}=10\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$		73		pF
Output Capacitance	C_{oss}			29		
Reverse Transfer Capacitance	C_{rss}			16		
Total Gate Charge	Q_g	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=0.8\text{A}$		2.23		nC
Gate-Source Charge	Q_{gs}			0.63		
Gate-Drain Charge	Q_{gd}			0.38		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=0.7\text{A}$ $R_G=51\Omega$		5		nS
Turn-on rise time	t_r			8.2		
Turn-off delay time	$t_{d(off)}$			23		
Turn-off fall time	t_f			41		
Source-Drain Diode characteristics						
Diode Forward Current	I_S				0.6	A
Diode Forward voltage ³⁾	V_{SD}	$V_{GS}=0\text{V}, I_S=0.6\text{A}$			1.2	V

Notes:

- 1) The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.
- 2) The EAS data shows Max. rating. The test condition is $V_{DD}=15\text{V}, V_{GS}=6\text{V}, L=10\text{mH}$.
- 3) The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- 4) Guaranteed by design, not subject to production testing.

Typical Characteristics

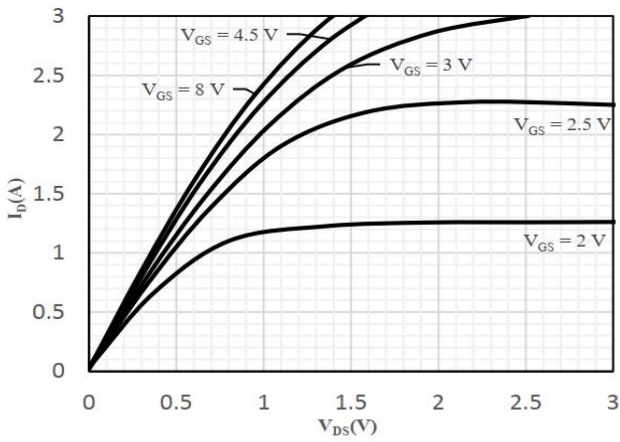


Fig 1 Output Characteristics

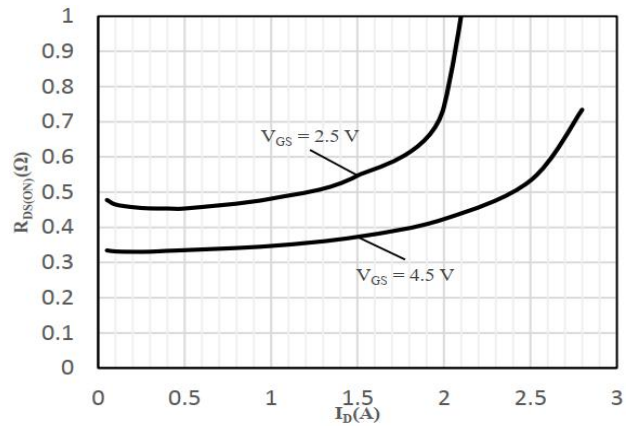


Fig 2 On-Resistance vs. Drain Current and Gate Voltage

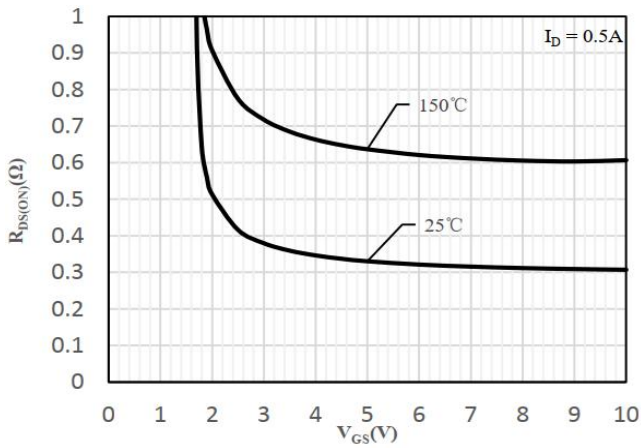


Fig 3 On-Resistance vs. Gate-Source Voltage

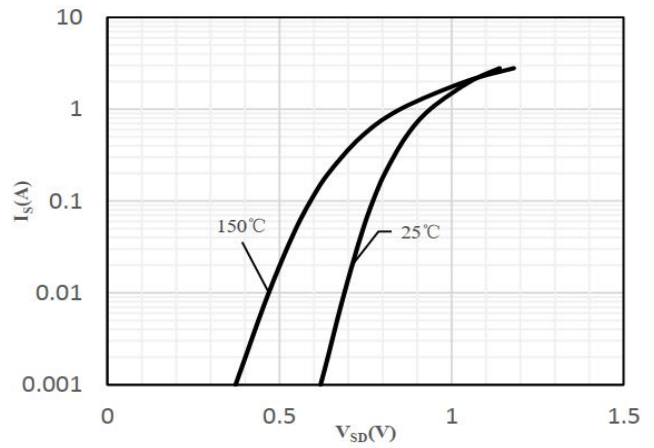


Fig 4 Body-Diode Characteristics

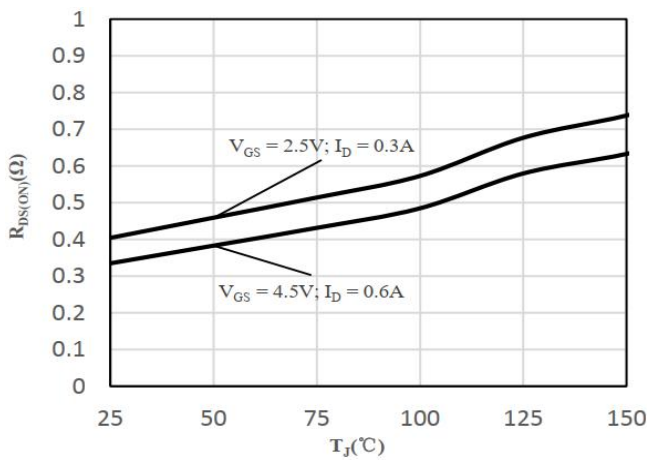


Fig 5 On-Resistance vs. Junction Temperature

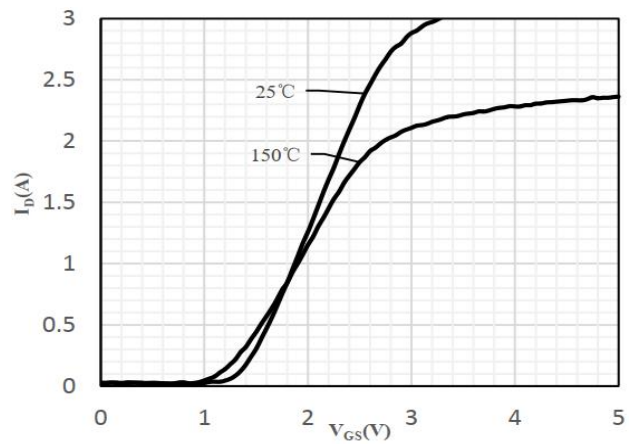


Fig 6 Transfer Characteristics

Typical Characteristics

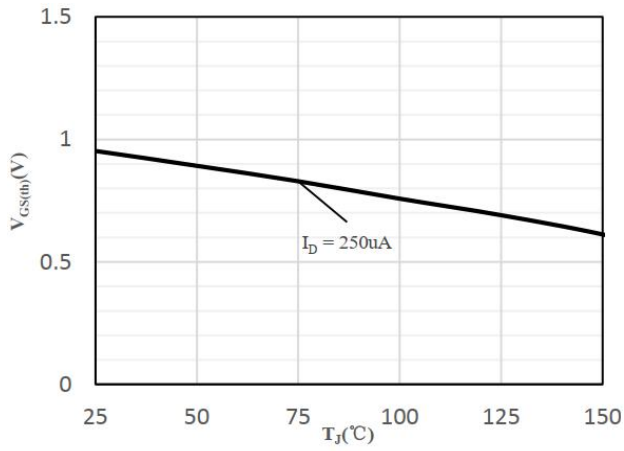


Fig 7 $V_{GS(th)}$ vs. Junction Temperature

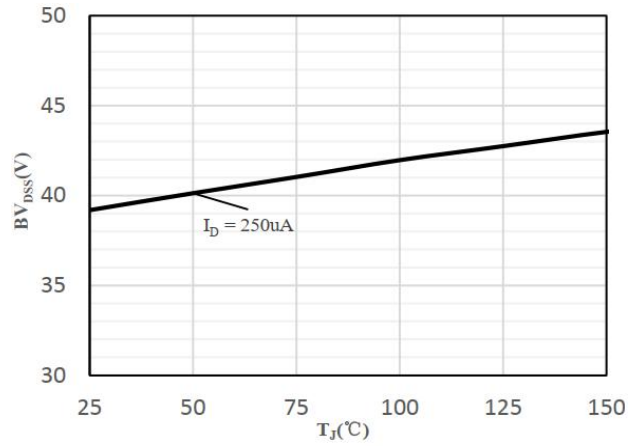


Fig 8 Breakdown Voltage vs. Junction Temperature

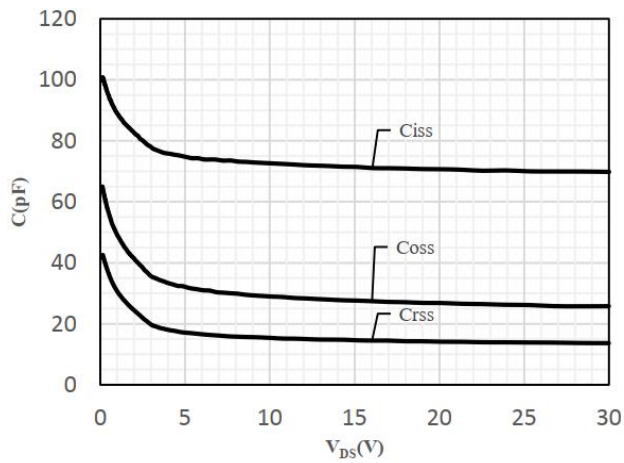


Fig 9 Capacitance Characteristics


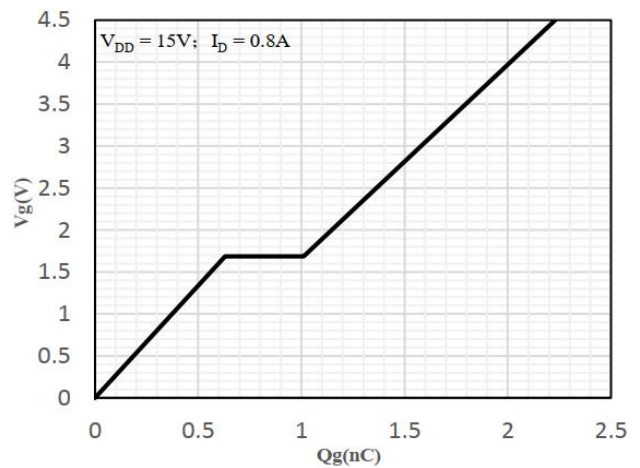


Fig 10 Gate-Charge Characteristics

SOT-23 Package Information

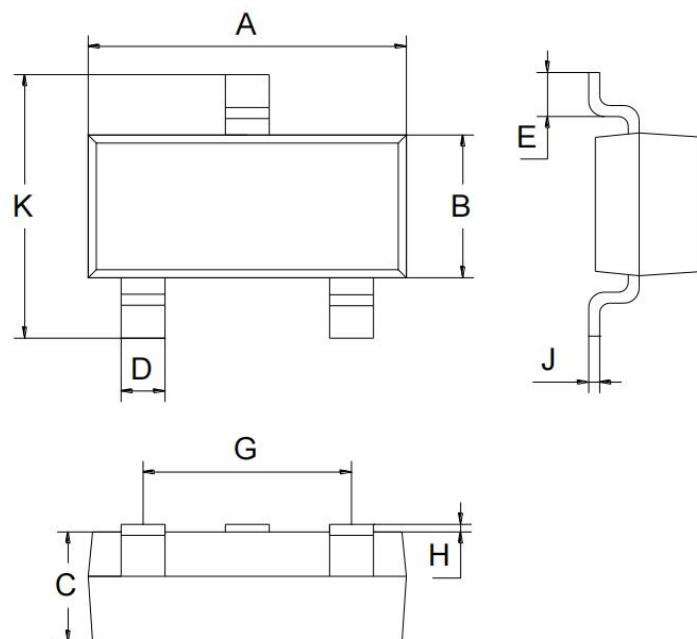

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.700	3.100	0.106	0.122
B	1.100	1.500	0.043	0.059
C	0.900	1.100	0.035	0.043
D	0.300	0.500	0.012	0.020
E	0.350	0.480	0.014	0.019
G	1.800	2.000	0.071	0.079
H	0.020	0.100	0.001	0.004
J	0.050	0.150	0.002	0.006
K	2.200	2.600	0.087	0.102