

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-20V	32mΩ@-4.5V	-5.5A
	40mΩ@-2.5V	


Feature

- High power and current handling capability
- Surface mount package

Application


- Battery switch
- DC/DC converter

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	-5.5	A
Pulsed Drain Current	I_{DM}	-22	A
Power Dissipation	P_D	1.1	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	113	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$


Electrical characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-20			V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=-16V, V_{GS}=0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 12V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.4	-0.65	-1.0	V
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-3.5A$		25	32	m Ω
		$V_{GS}=-2.5V, I_D=-3A$		30	40	
Dynamic characteristics ¹⁾						
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, f=1MHz$		960		pF
Output Capacitance	C_{oss}			127		
Reverse Transfer Capacitance	C_{rss}			96		
Total Gate Charge	Q_g	$V_{DS}=-15V, V_{GS}=-4.5V$ $I_D=-3A$		9.4		nC
Gate-Source Charge	Q_{gs}			1.3		
Gate-Drain Charge	Q_{gd}			2.3		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=-10V, V_{GS}=-4.5V$ $I_D=-3A, R_G=3.3\Omega$		9.8		nS
Turn-on rise time	t_r			26.2		
Turn-off delay time	$t_{d(off)}$			48.5		
Turn-off fall time	t_f			41.6		
Source-Drain Diode characteristics						
Diode Continuous Current	I_S				-5.5	A
Diode Forward voltage	V_{SD}	$V_{GS}=0V, I_S=-1A, T_J=25^{\circ}C$			-1.2	V


Notes:

1) Guaranteed by design, not subject to production testing.


Typical Characteristics

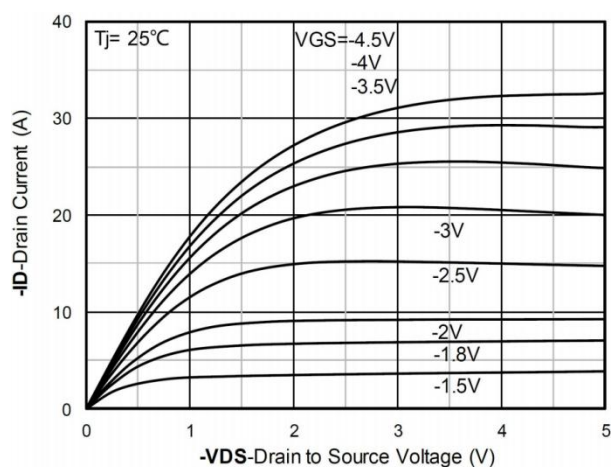


Output Characteristics

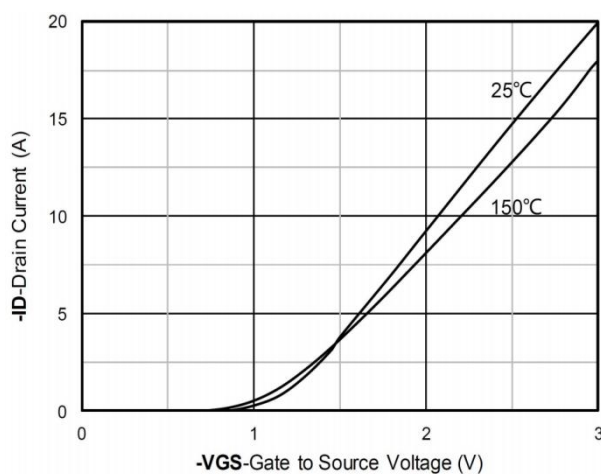


Transfer Characteristics

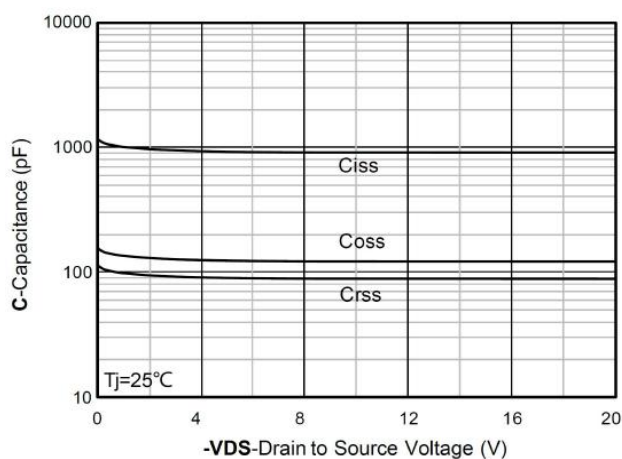


Capacitance Characteristics

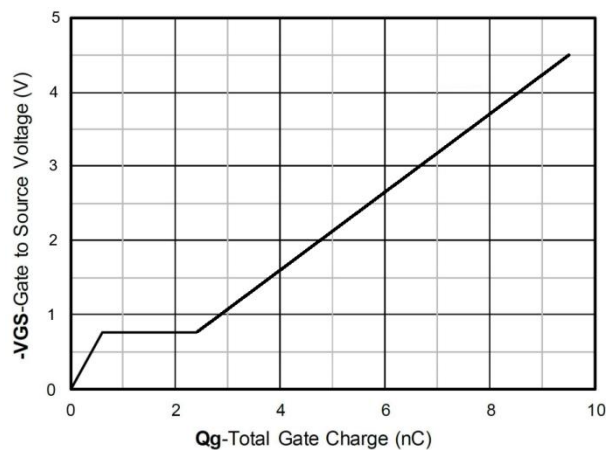

Gate Charge

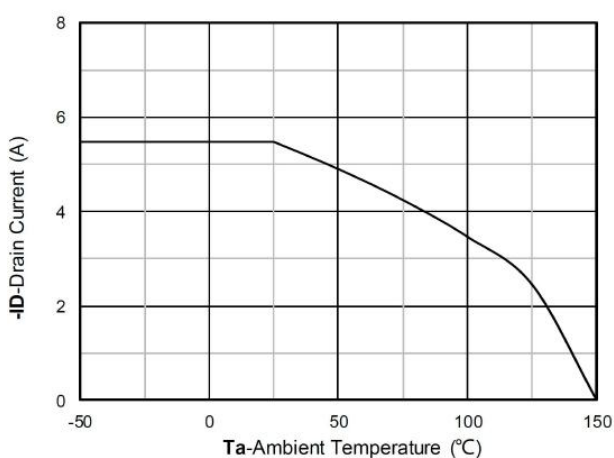


Current dissipation

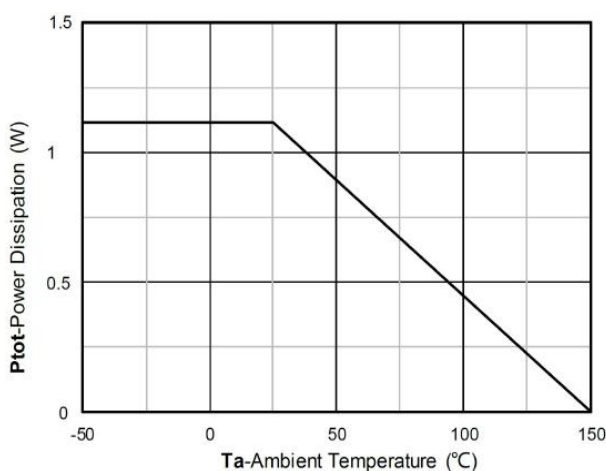


Power dissipation


Typical Characteristics

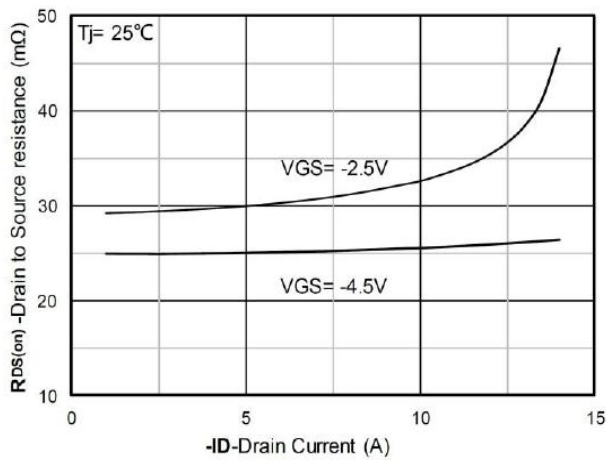


RDS(on) VS Drain Current

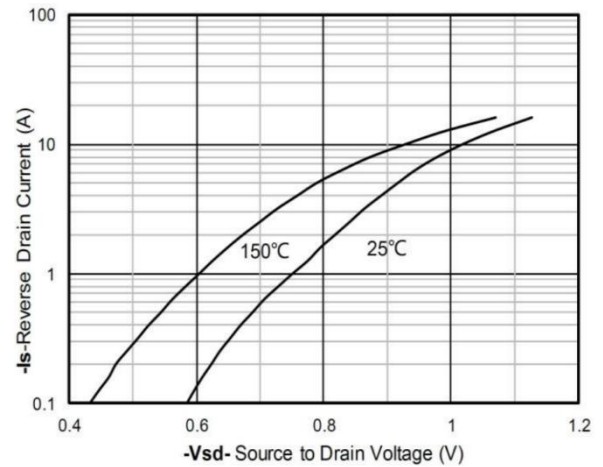


Forward characteristics of reverse diode

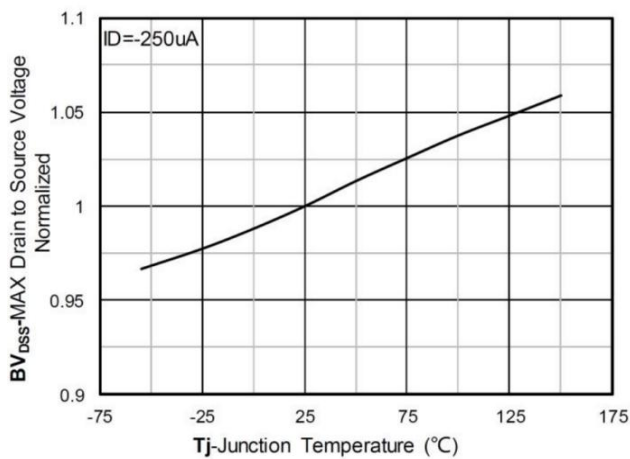


Normalized breakdown voltage

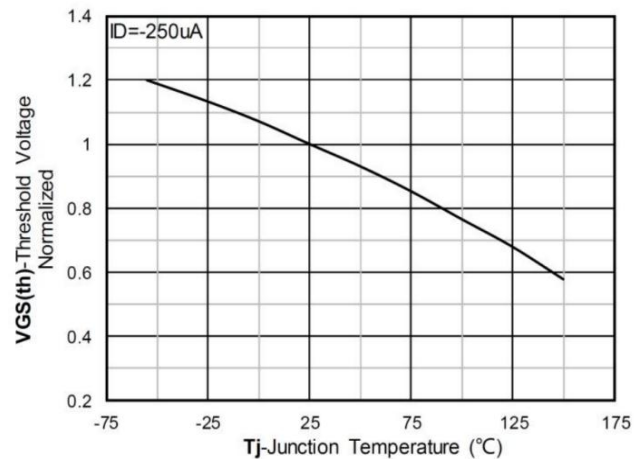

Normalized Threshold voltage

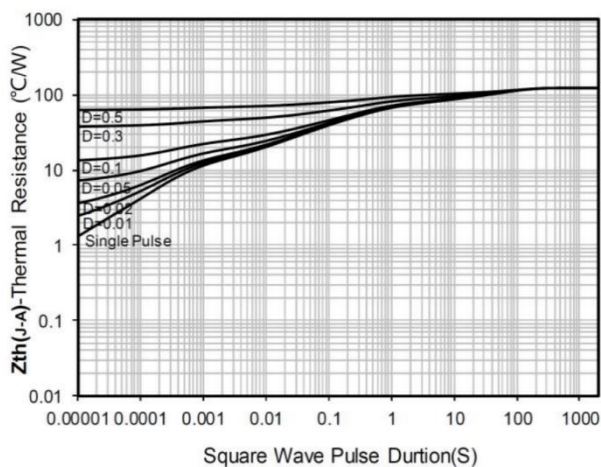


Maximum Transient Thermal Impedance

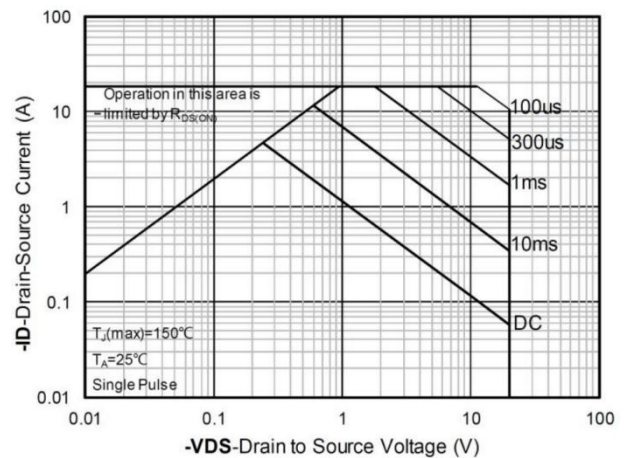

Safe Operation Area

SOT-23 Package Information

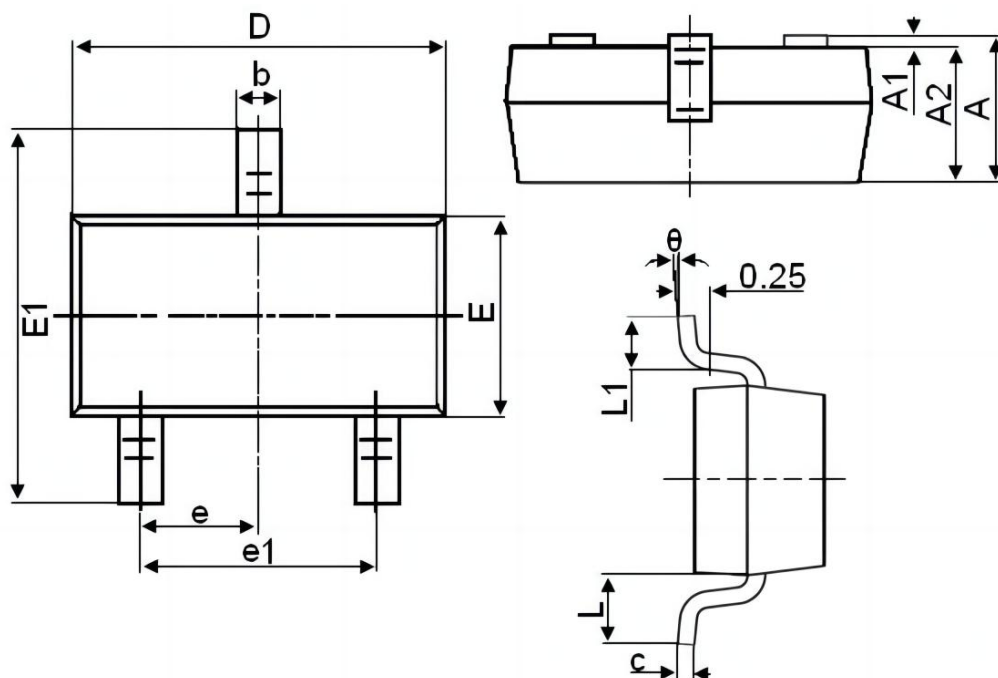

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 BSC .		0.037 BSC .	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°