


Features

- Ideal for automated placement
- Low profile surface mounted application in order to optimize board space
- Tiny plastic SMD package
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Guardring for overvoltage protection
- Compliant to Halogen-free

Mechanical data

- Package: SOD-123HT-F, Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity : Cathode line denotes the cathode end
- Mounting Position : Any

Package outline

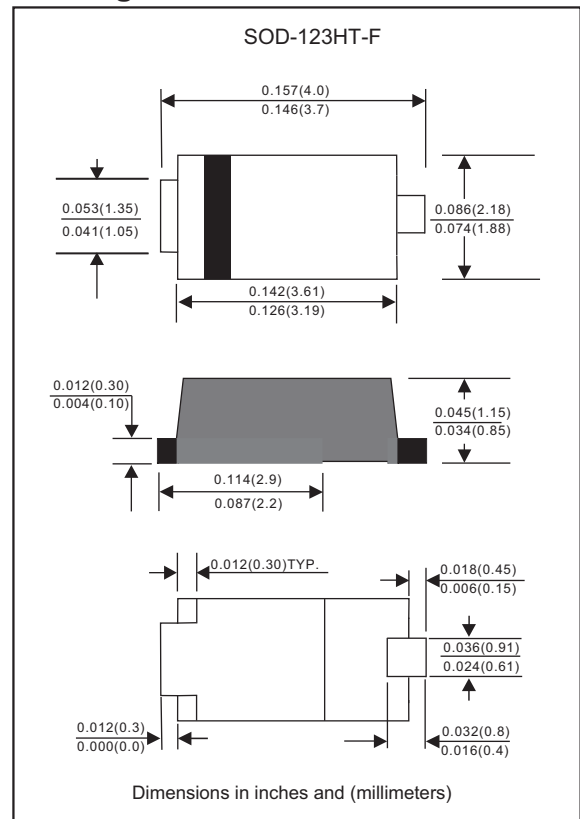

Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	DSL34-MHT-F	DSL36-MHT-F	DSL310-MHT-F	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	40	60	100	V
Maximum average forward rectified current @60Hz half -sine wave, 1 cycle, $T_J=25^\circ\text{C}$	I_o	3.0			A
Non-repetitive peak forward surge current @60Hz half -sine wave, 1 cycle, $T_J=25^\circ\text{C}$	I_{FSM}	60			A
Operating junction temperature range	T_J	-55 to +150			$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150			$^\circ\text{C}$

Electrical characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	DSL34-MHT-F	DSL36-MHT-F	DSL310-MHT-F	UNITS
Maximum instantaneous forward voltage at $I_F=3.0\text{A}$	V_F	0.45	0.50	0.60	V
Maximum reverse leakage current at $V_{RM}=V_{RRM}$	I_R	$T_A=25^\circ\text{C}$ 0.5 $T_A=100^\circ\text{C}$ 10		0.1 5	mA mA

Thermal characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	DSL34-MHT-F	DSL36-MHT-F	DSL310-MHT-F	UNITS
Thermal resistance junction to ambient	$R_{\theta JA}$	80			$^\circ\text{C}/\text{W}$

Notes1: Pulse test:300uS pulse width,1% duty cycle
2: Pulse test:pulse width 40mS

Rating and characteristic curves

FIG1: Io-TL Curve

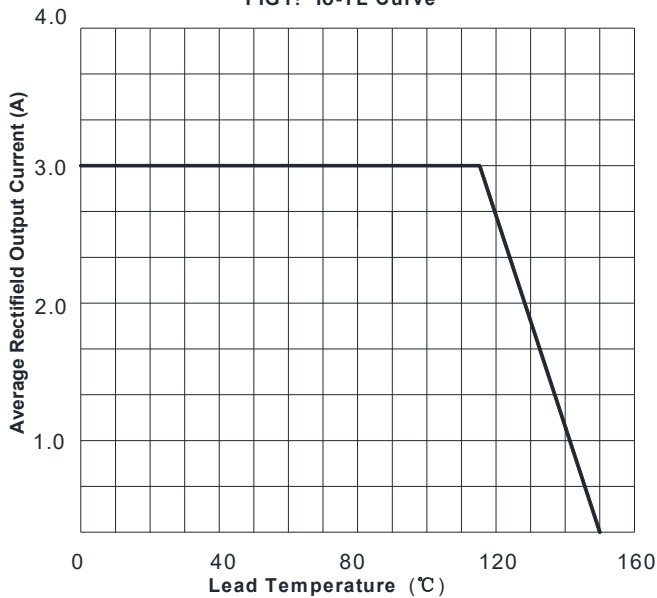


FIG2: Surge Forward Current Capability

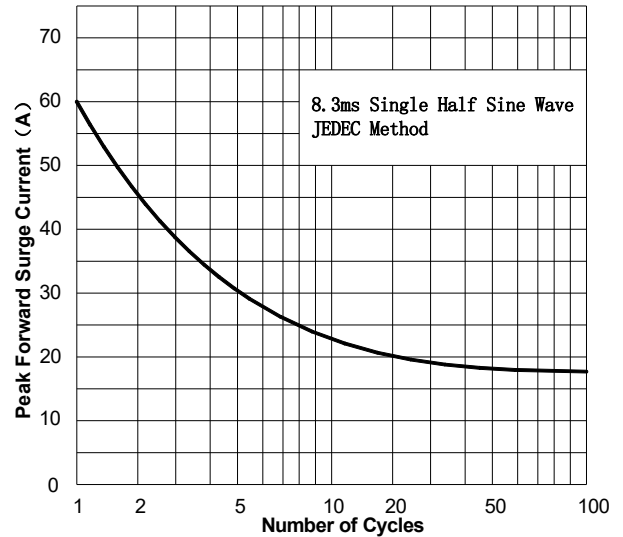


FIG3: Forward Voltage


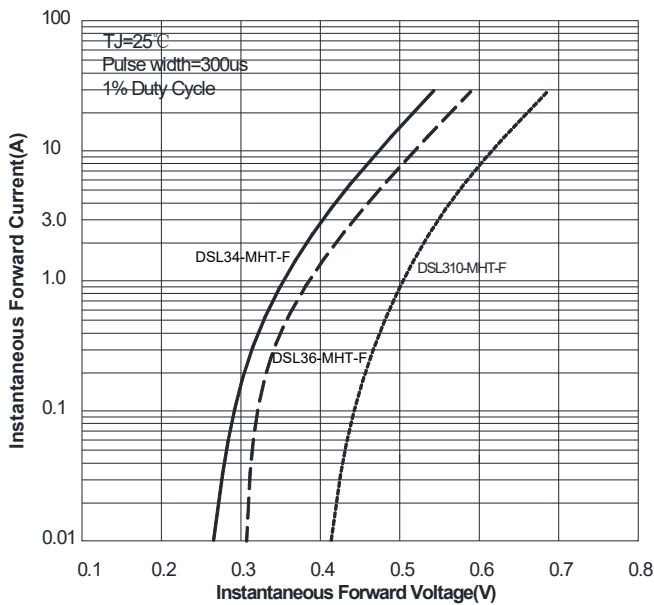




FIG4: Typical Reverse Characteristics

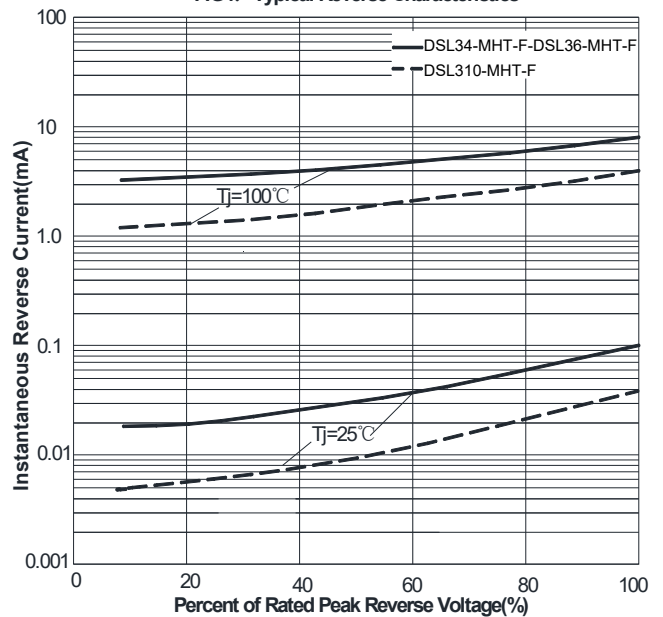


Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
DSL34-MHT-F	34L
DSL36-MHT-F	36L
DSL310-MHT-F	310L

Suggested solder pad layout

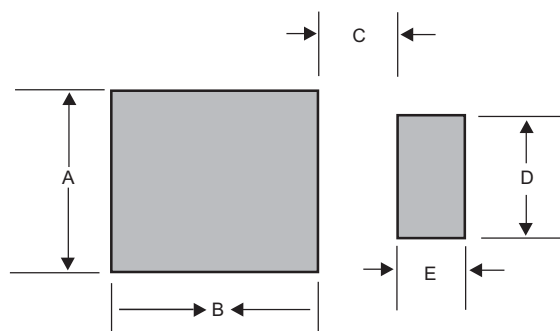

Dimensions in inches and (millimeters)

PACKAGE	A	B	C	D	E
SOD-123HT-F	0.100(2.54)	0.105(2.67)	0.025(0.64)	0.048(1.23)	0.030(0.76)