


Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Compliant to Halogen-free

Mechanical data

- Case: SOD-323HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: color band denotes cathode end

Package outline

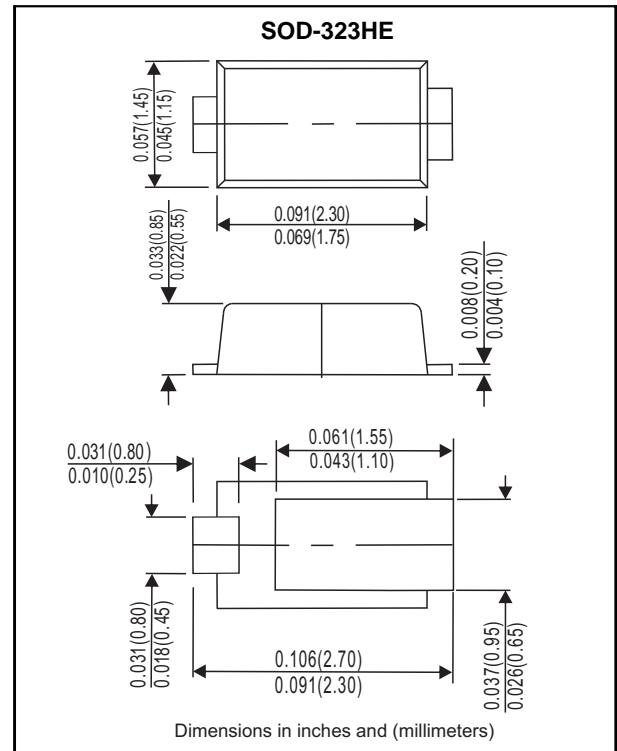

Maximum Ratings ($T_A=25^\circ\text{C}$ Unless otherwise specified)

(Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS Voltage	V_{RMS}	28	
Maximum DC Blocking Voltage	V_{DC}	40	
Average Forward Rectified Current	$I_{F(AV)}$	2	A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I_{FSM}	25	A
Typical Thermal Resistance (1)	$R_{\theta JA}$	130	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ Unless otherwise specified)

Parameter	Test Conditions	Symbol	Value (max)	Unit
Forward Voltage	$I_F=2\text{A}$	V_F	0.53	V
	$I_F=1\text{A}$		0.47	
Reverse Current	$T_A=25^\circ\text{C}$, @ $V_R=V_{RRM}$	I_R	0.3	mA
	$T_A=100^\circ\text{C}$, @ $V_R=V_{RRM}$		15	
Typical Junction Capacitance (2)		C_J	330	pF

(1) P.C.B. mounted with 3.81*3.81cm copper pad areas.

(2) Measured at 1 MHz and applied reverse voltage of 4 V D.C

Rating and characteristic curves

Fig.1 Forward Current Derating Curve

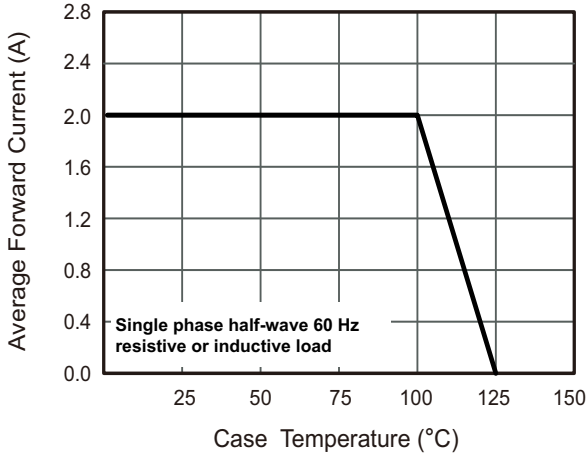


Fig.2 Typical Reverse Characteristics

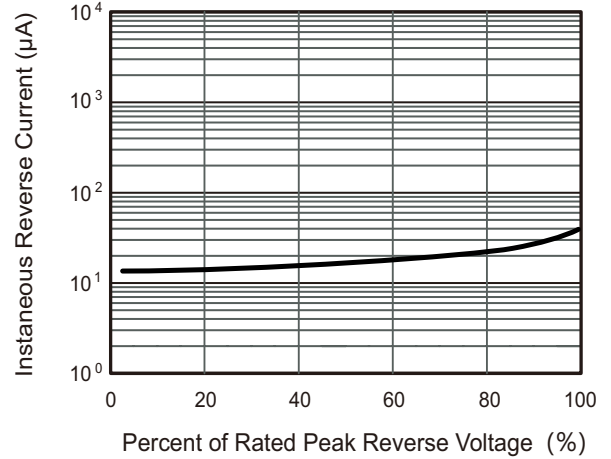


Fig.3 Typical Forward Characteristic

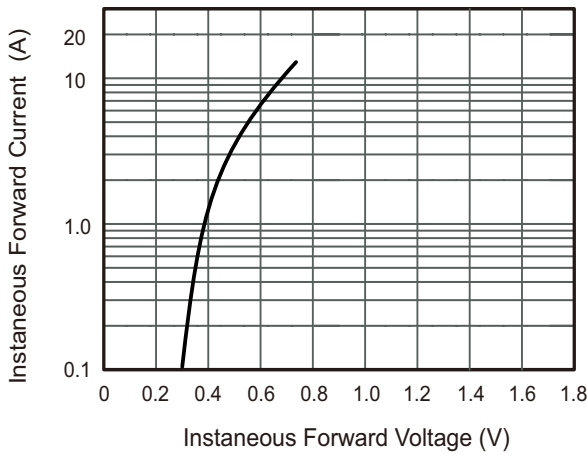


Fig.4 Typical Junction Capacitance

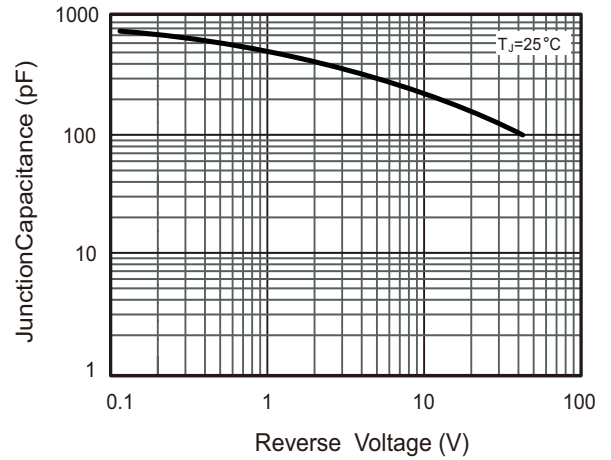


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


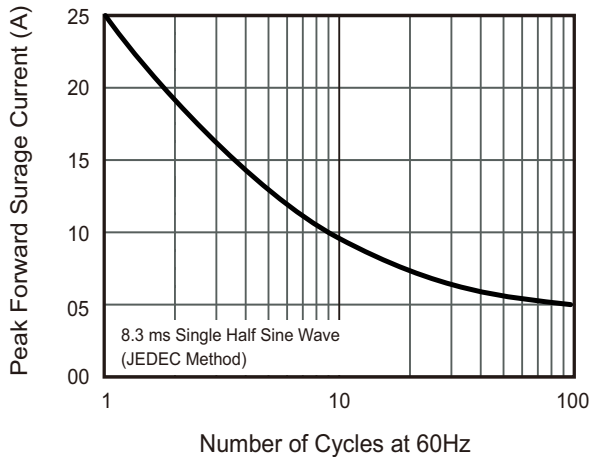




Fig.6- Typical Transient Thermal Impedance

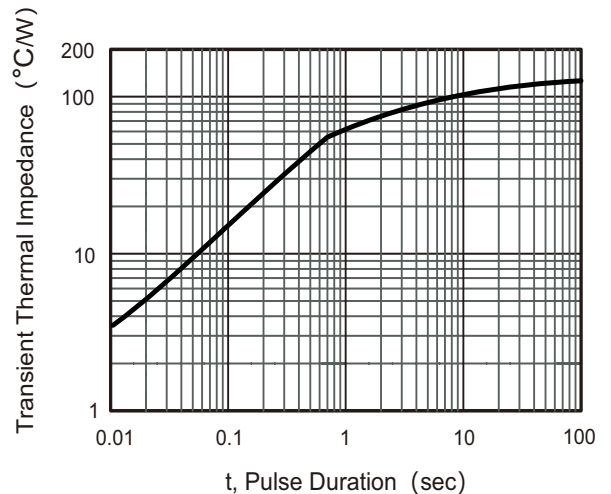


Pinning information

Pin	Simplified outline	Symbol
Uni-Directional Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
SU24-NHT-D	24

Suggested solder pad layout

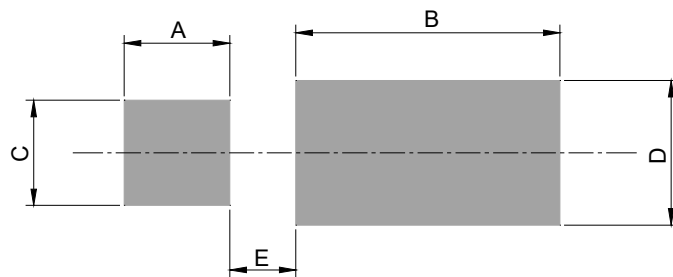

Dimensions in inches and (millimeters)

PACKAGE	A	B	C	D	E
SOD-323HE	0.035 (0.90)	0.073 (1.85)	0.039 (1.00)	0.043 (1.10)	0.018(0.45)