

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	55mΩ@4.5V	3.0A
	80mΩ@2.5V	


Feature

- Advanced trench process technology
- High density cell design for ultra low on-resistance

Application


- Load Switch for Portable Devices
- DC/DC Converter

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 10	V
Continuous Drain Current	I_D	3.0	A
Pulsed Drain Current	I_{DM}	14	A
Power Dissipation	P_D	0.7	W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Electrical characteristics (T_A=25 °C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	20			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 20V, V_{GS} = 0V$			1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 10V, V_{DS} = 0V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	0.55		1.25	V
Drain-source on-resistance ¹⁾	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 3A$			55	m Ω
		$V_{GS} = 2.5V, I_D = 2A$			80	
Dynamic characteristics ²⁾						
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 1MHz$		220		pF
Output Capacitance	C_{oss}			34		
Reverse Transfer Capacitance	C_{rss}			28		
Total Gate Charge	Q_g	$V_{DS} = 10V, V_{GS} = 4.5V, I_D = 3.0A$		3.81		nC
Gate-Source Charge	Q_{gs}			0.88		
Gate-Drain Charge	Q_{gd}			0.77		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 10V, V_{GS} = 4.5V, R_{GEN} = 3\Omega, R_L = 1.5\Omega$		8.8		nS
Turn-on rise time	t_r			57		
Turn-off delay time	$t_{d(off)}$			14		
Turn-off fall time	t_f			53		
Source-Drain Diode characteristics						
Diode Forward Current ¹⁾	I_S				3.0	A
Diode Forward voltage	V_{DS}	$V_{GS} = 0V, I_S = 3A$			1.2	V

Notes:

- 1) Pulse Test: Pulse Width < 300 μs , Duty Cycle $\leq 2\%$.
- 2) Guaranteed by design, not subject to production testing.

Typical Characteristics

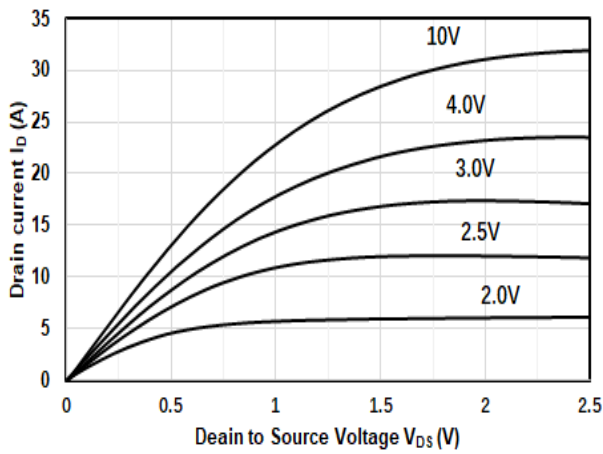


Figure1. Output Characteristics

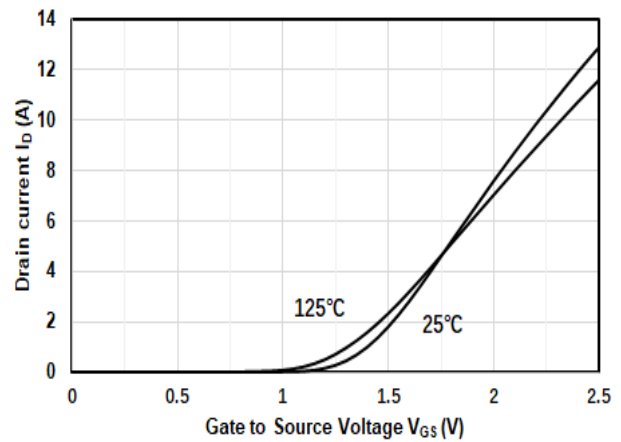


Figure2. Transfer Characteristics

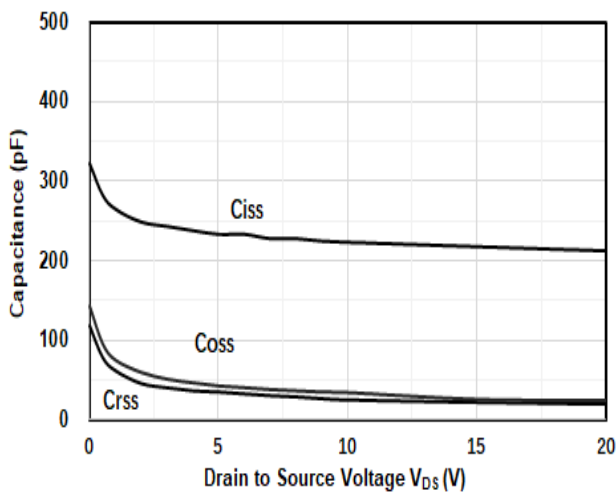


Figure3. Capacitance Characteristics

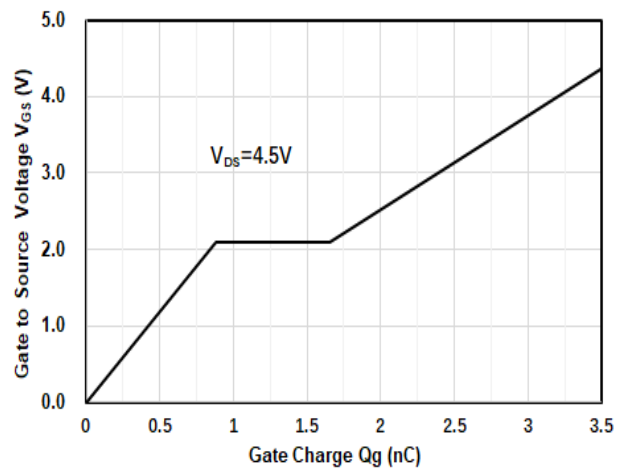


Figure4. Gate Charge

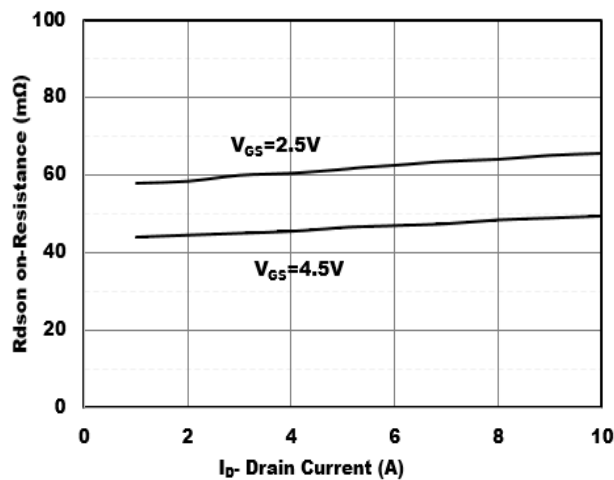


Figure5. Drain-Source on Resistance

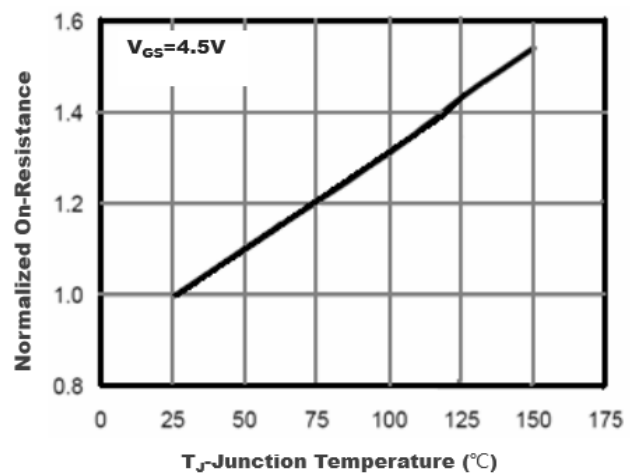


Figure6. Drain-Source on Resistance

Typical Characteristics

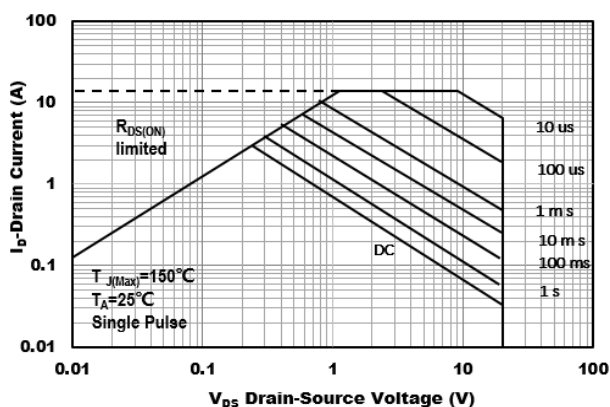


Figure7. Safe Operation Area

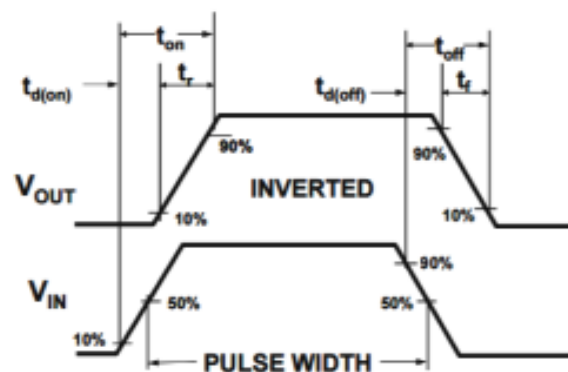


Figure8. Switching wave

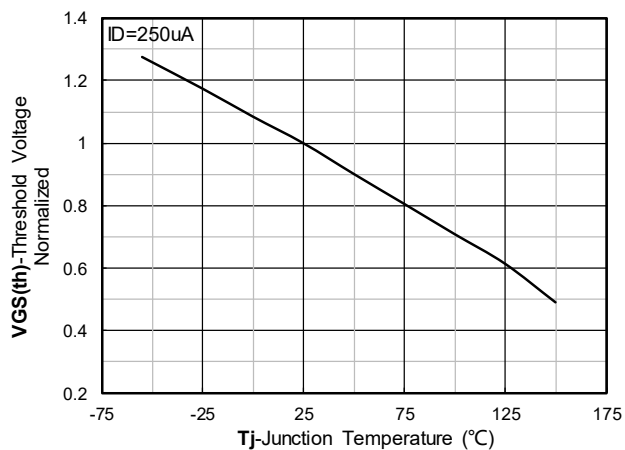


Figure 9. Normalized Threshold voltage




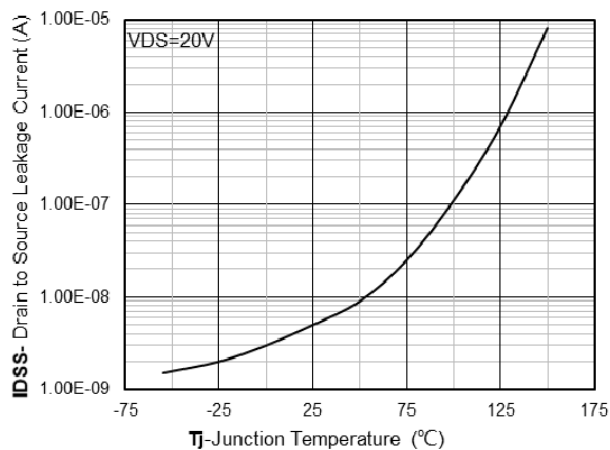


Figure 10. Drain to Source Leakage Current

SOT-23 Package Information

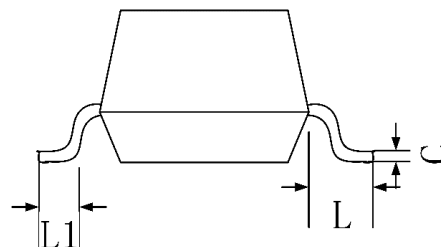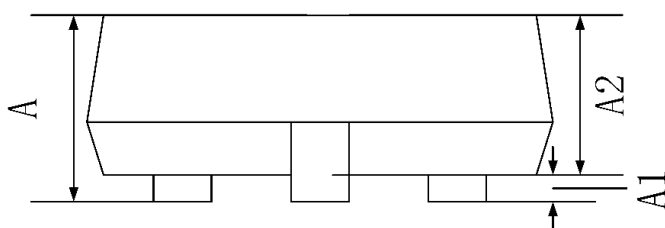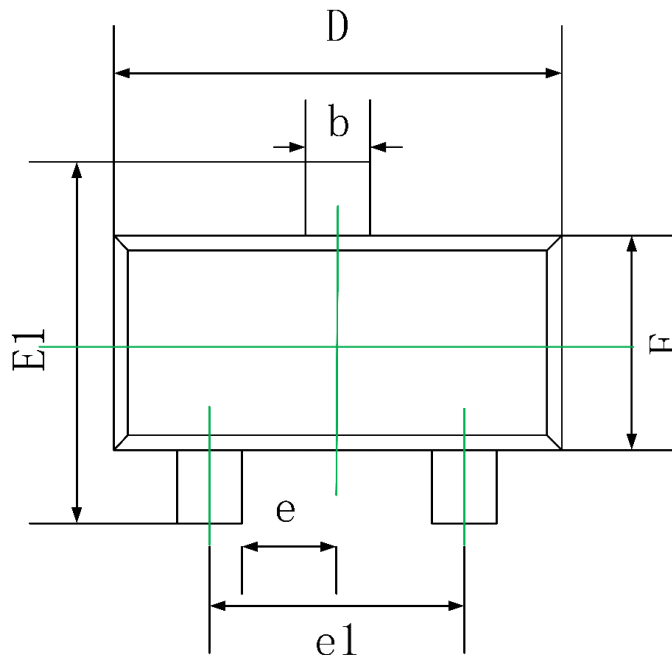

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.200	0.003	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020